

Nonlinear System Identification A User-Oriented Roadmap

Johan Schoukens

Extended presentation - May 25, 2020



This presentation is an extended version of the plenary lecture
Nonlinear System Identification. A User-Oriented Roadmap.
18th IFAC Symposium on System Identification, SYSID 2018,
Stockholm, Sweden, July 9-11, 2018.

The paper

Nonlinear System Identification: A User-Oriented Road Map

Johan Schoukens and Lennart Ljung

IEEE Control Systems Magazine, vol. 39 (6), pp. 28-99, 2019

▶ Schoukens and Ljung (2019) IEEE Control Systems Magazine

provides more information on the topic and references to the material used in this presentation.



Linear



Nonlinear

Time-Varying

Outline

Why is nonlinear SI so involved?

Linear or nonlinear SI? A users decision

The lead actors in SI

Linear identification in the presence of nonlinear distortions

Nonlinear SI: Extensive case study

Conclusions

Outline

- ▶ Why is nonlinear SI so involved?

 - From hyperplane to manifold

 - Model errors

 - Process noise

Linear or nonlinear SI? A users decision

The lead actors in SI

Linear identification in the presence of nonlinear distortions

Nonlinear SI: Extensive case study

Conclusions


From hyperplane to manifold ¹

Linear models: a hyperplane


Nonlinear models: a manifold

only known where domain is sampled
extrapolation should be avoided

Linear

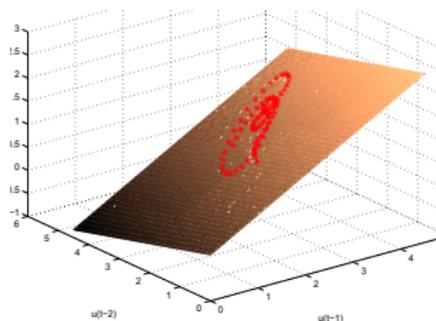

Nonlinear

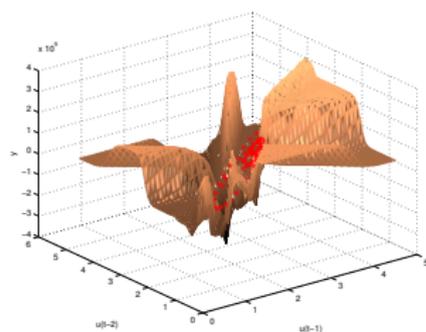

¹ Acknowledgement Ljung, Bode Lecture IEEE CDC 2003



Model errors

Impossible to avoid in many cases

Affect experiment design and choice cost function

Residuals no longer independent of input

Process noise

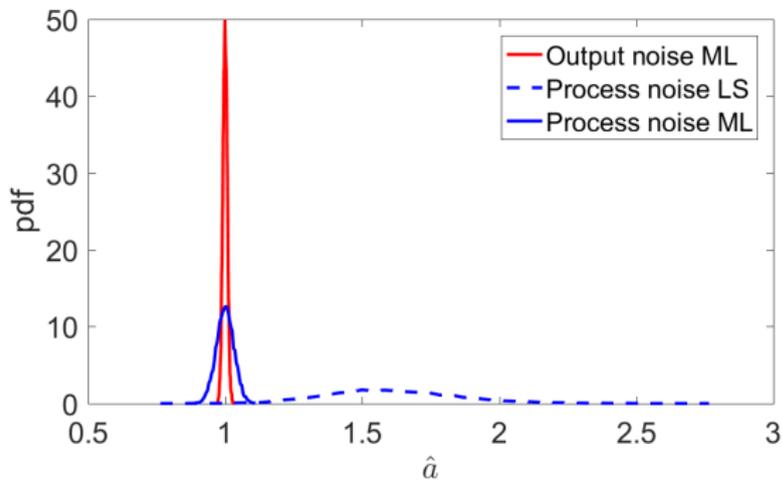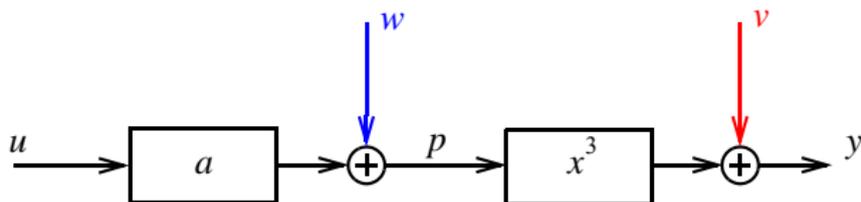

Outline

Why is nonlinear SI so involved?

- ▶ Linear or nonlinear SI? A users decision
 - Nonparametric distortion analysis
 - Example: the Duffing Oscillator

The lead actors in SI

Linear identification in the presence of nonlinear distortions

Nonlinear SI: Extensive case study

Conclusions

Linear or nonlinear SI? A users decision

Nonlinear SI much more 'expensive' than linear SI

Make a well informed decision

Do we face a nonlinear identification problem?

Safe to use a linear system identification approach?

How much to gain with a nonlinear model?

Linear or nonlinear SI? A users decision

Nonlinear SI much more 'expensive' than linear SI

Make a well informed decision

Do we face a nonlinear identification problem?

Safe to use a linear system identification approach?

How much to gain with a nonlinear model?

Detection, qualification, quantification NL distortions

Characterize nonlinear behavior

No increase of the measurement time

Little user interaction

Linear or nonlinear SI? A users decision

Nonlinear SI much more 'expensive' than linear SI

Make a well informed decision

Do we face a nonlinear identification problem?

Safe to use a linear system identification approach?

How much to gain with a nonlinear model?

Detection, qualification, quantification NL distortions

Characterize nonlinear behavior

No increase of the measurement time


Little user interaction

Tool: well-designed periodic excitations

$$u_0(t) = \frac{2}{\sqrt{N}} \sum_{k=1}^{N/2-1} U_k \cos(2\pi k f_0 t + \varphi_k)$$


Understanding nonlinear systems: $y = u^3$

$$u(t) = 2 \cos \omega t$$
$$= e^{j\omega t} + e^{-j\omega t} \text{ with } \omega = 1$$

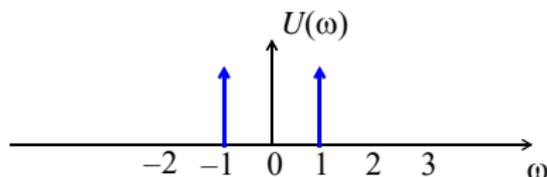

Understanding nonlinear systems: $y = u^3$


$$\begin{aligned}u(t) &= 2 \cos \omega t \\ &= e^{j\omega t} + e^{-j\omega t} \text{ with } \omega = 1\end{aligned}$$

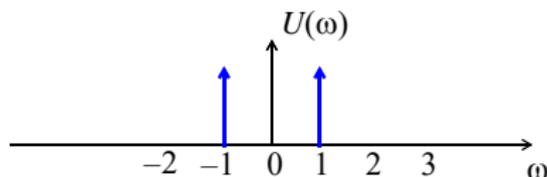

$$\begin{aligned}y &= u^3 \\ &= (e^{j\omega t} + e^{-j\omega t})(e^{j\omega t} + e^{-j\omega t})(e^{j\omega t} + e^{-j\omega t})\end{aligned}$$


Understanding nonlinear systems: $y = u^3$

$$u(t) = 2 \cos \omega t \\ = e^{j\omega t} + e^{-j\omega t} \text{ with } \omega = 1$$





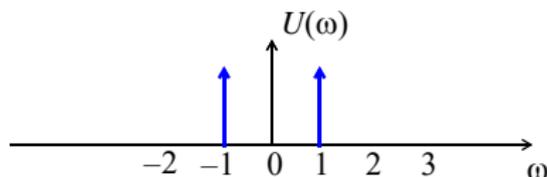


$$y = u^3 \\ = (e^{j\omega t} + e^{-j\omega t})(e^{j\omega t} + e^{-j\omega t})(e^{j\omega t} + e^{-j\omega t})$$

1	1	1	3
1	1	-1	1
1	-1	1	1
1	-1	-1	-1
-1	1	1	1
-1	1	-1	-1
-1	-1	1	-1
-1	-1	-1	-3

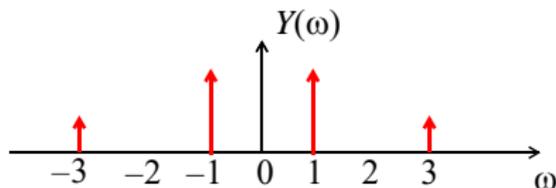


Detection and qualification of nonlinear distortions

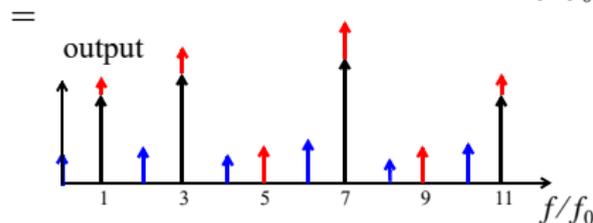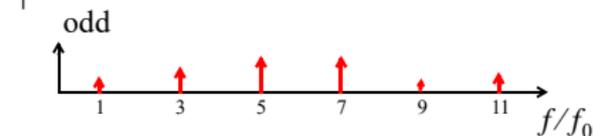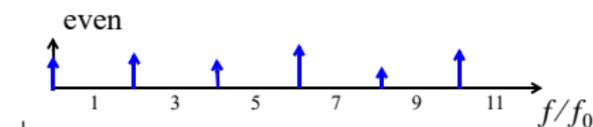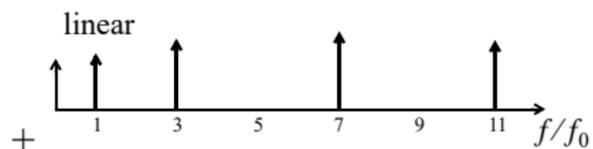
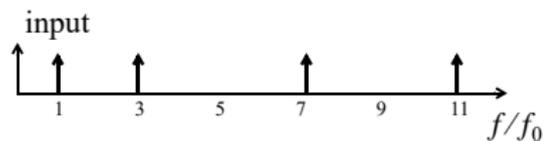


► A detailed example

Example: the forced Duffing oscillator

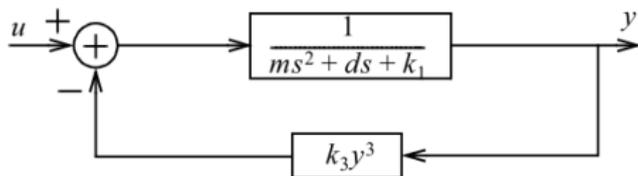


Example: the forced Duffing oscillator

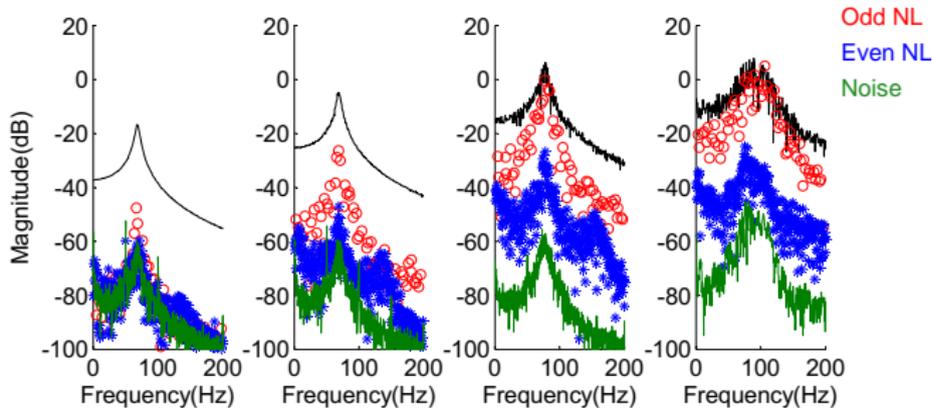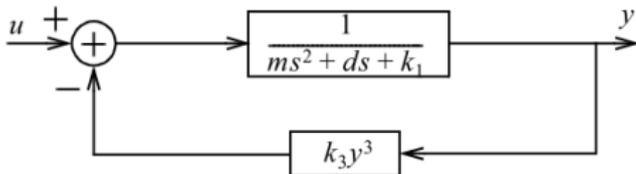

Example: an air fighter²



Example: an air fighter²

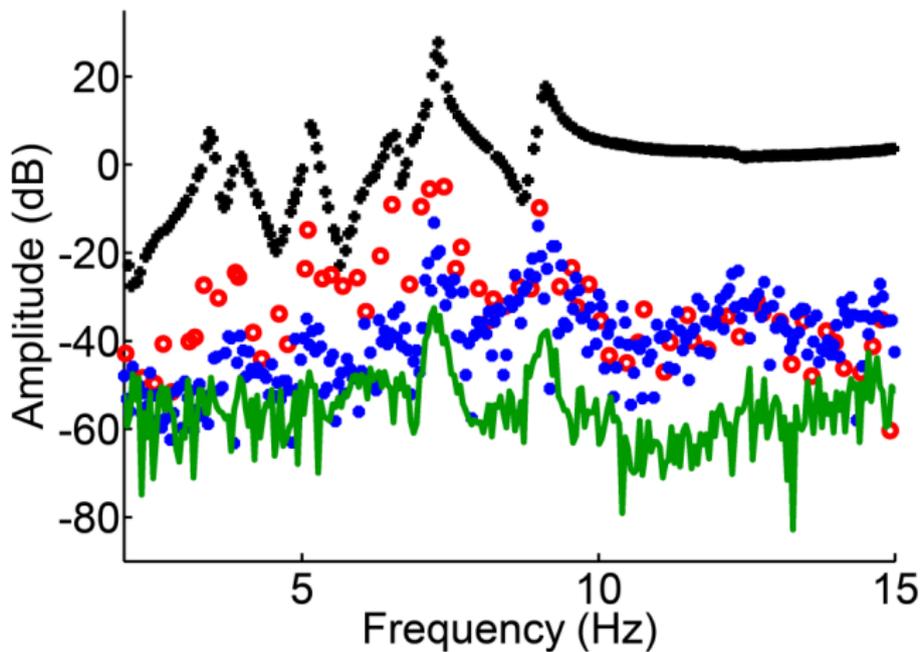

Output

Odd NL

Even NL

Noise

²Acknowledgement M. Vaes (VUB), B. Peeters, J. Debille (Siemens Industry Software), T. Dossogne, J.P. Noël, C. Grappasaonni, G. Kerschen (ULg)

Outline

Why is nonlinear SI so involved?

Linear or nonlinear SI? A users decision

- ▶ The lead actors in SI

 - Data

 - Cost


 - Model

Linear identification in the presence of nonlinear distortions


Nonlinear SI: Extensive case study

Conclusions

Lead actors in SI from a nonlinear perspective

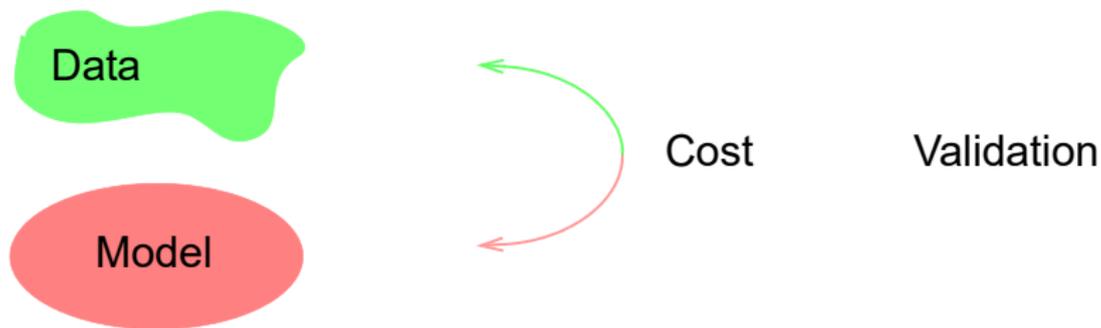


Lead actors in SI from a nonlinear perspective






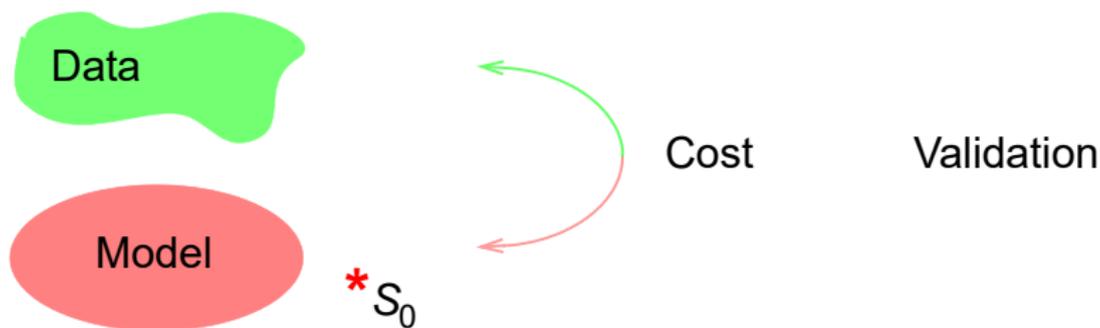


» User choices in the presence of model errors

Data: amplitude distribution

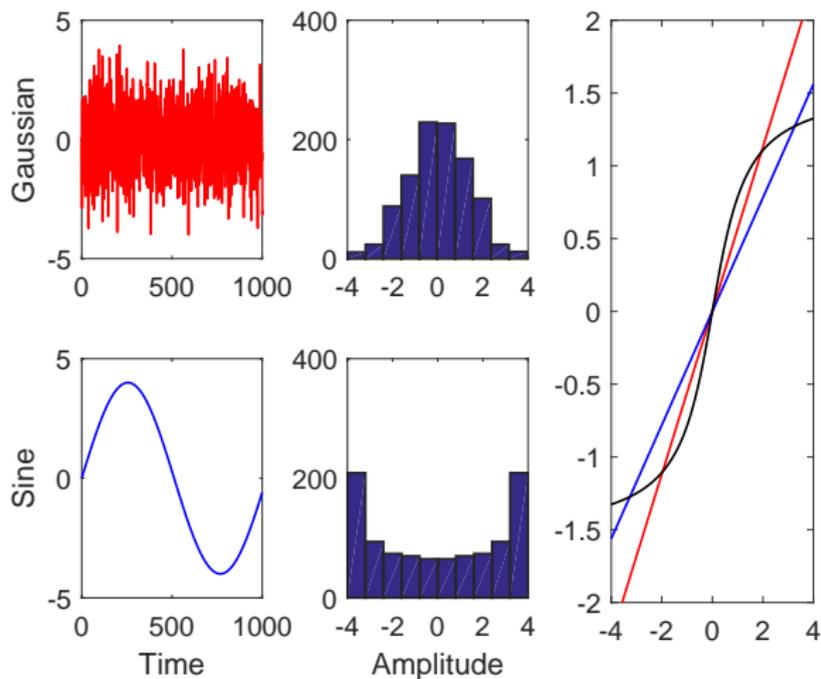

Data: cover domain of interest

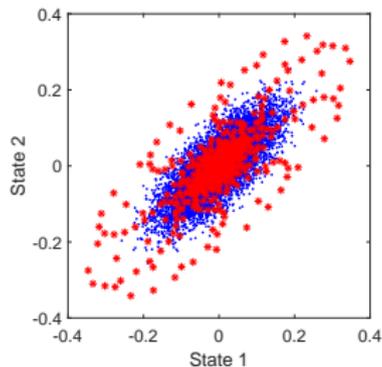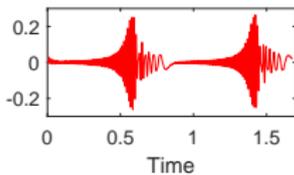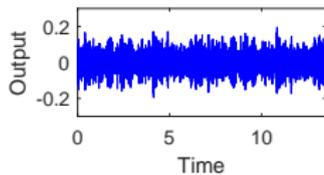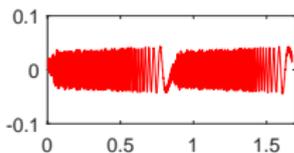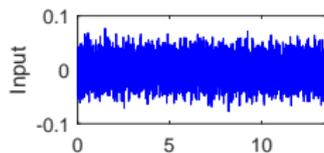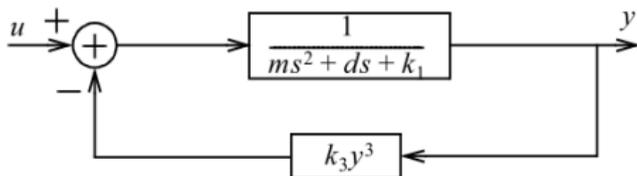

► Error plot

Data: experiment design

Optimal experiment design is still an open problem

User guidelines

Use periodic excitations

- Nonparametric distortion analysis

- No user interaction

- Separation of plant and noise model

- No inference with model errors

Cover amplitude and frequency range of interest

- Necessary but not sufficient condition


- Pay attention to the state domain

- Strongly linked to application: use excitation with same nature

Repeat experiment with new realization of random excitation

Use linear SI insights to excite the dynamics


Experiment design: example³

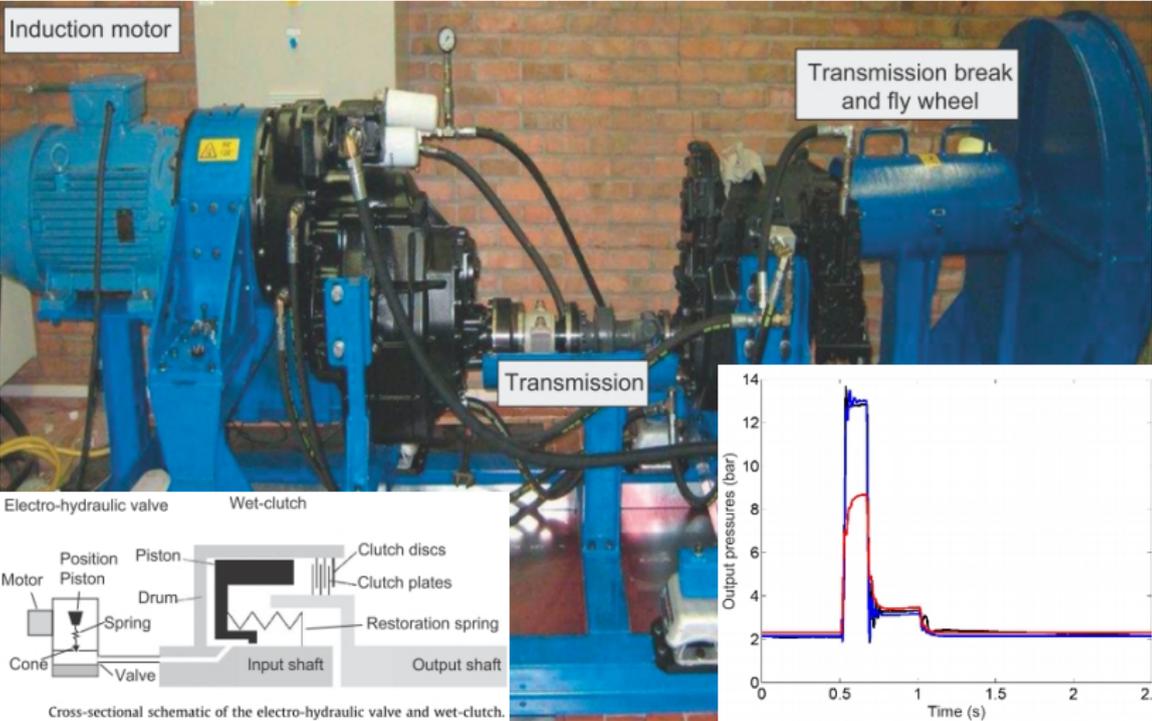

³ Acknowledgement W.D. Widanage, A. Van Mulders (VUB), J. Stoev, G. Pinte (FMTC)

Experiment design: example³

Input

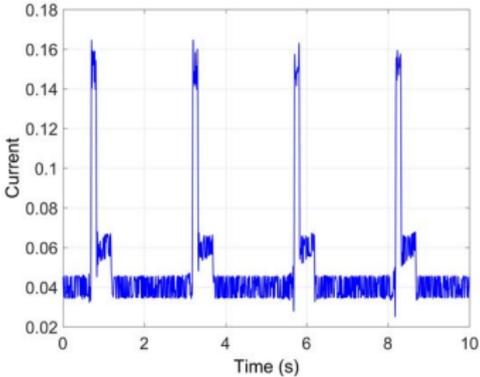

The collage contains the following elements:

- Photograph:** A blue industrial machine setup. Labels include 'Induction motor' on the left, 'Transmission' in the center, and 'Transmission break and fly wheel' on the right.
- Schematic:** A cross-sectional diagram of the electro-hydraulic valve and well-clutch. Labels include: Motor, Position Piston, Spring, Valve, Piston, Drum, Clutch discs, Clutch plates, Restoration spring, Input shaft, and Output shaft.
- Inset Graph:** A small graph showing Output pressure (bar) on the y-axis (0 to 14) and Time (s) on the x-axis (0 to 2.5). It shows a sharp peak in pressure reaching about 13 bar at 0.5 seconds, followed by a rapid decay to a steady state of about 2 bar.

³ Acknowledgement W.D. Widanage, A. Van Mulders (VUB), J. Stoev, G. Pinte (FMTC)

Cost



Minimize the distance between the data and the model
Model errors dominate \rightarrow move away from ML paradigm
Should reflect user's need how to shape model errors
Least squares cost functions in TD and FD

$$\hat{\theta}_N = \operatorname{argmin}_{\theta} \sum_{t=1}^N \|y(t) - \hat{y}(t|\theta)\|^2$$

$$\hat{\theta}_N = \operatorname{argmin}_{\theta} \sum_{f \in \mathcal{F}} \|Y(f) - \hat{Y}(f|\theta)\|^2$$

Can be combined with regularization

Model




Estimates future outputs

$$\hat{y}(t|\theta, Z^{t-})$$


What data are used?

Model structure?

Model: what data are used?

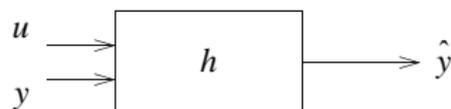

simulation

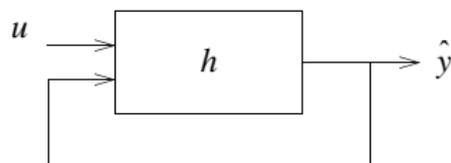

prediction

Prediction model

uses past inputs and outputs: $Z^t = \{u^t, y^{t-1}\}$

Simulation model

uses only past inputs: $Z^t = u^t$

▶ Basic idea prediction

Model: selection model structure

$$\hat{y}(t|\theta, Z^{t-})$$

System behavior

open loop - dynamic NL closed loop

Users choice

white box - black box models


Nonlinear function

present in every nonlinear model


$q(t) = f(p(t))$ with p, q signals in the model

f a static multivariate function


System behavior: open loop - dynamic NL closed loop

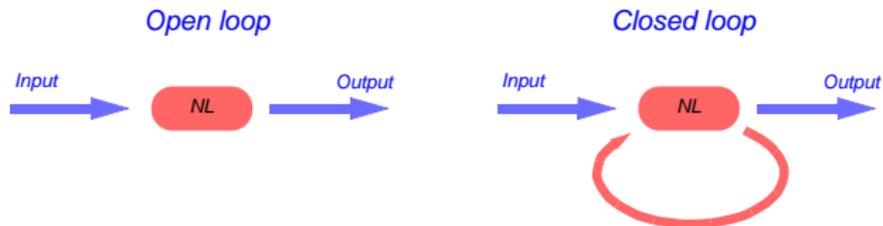

Hysteresis

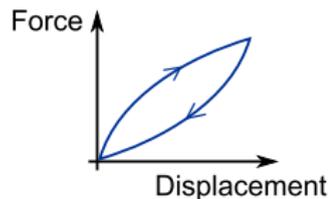

Varying dynamics

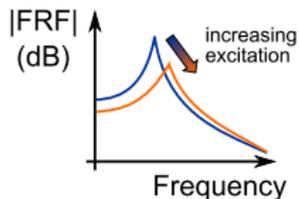

Chaos



System behavior: open loop - dynamic NL closed loop

NL Open loop

NL not captured in a dynamic feedback loop

Fading memory

Examples

NFIR

Volterra [▶ Volterra theory in a nutshell](#)

Block-oriented models: Wiener, Hammerstein,

Wiener-Hammerstein, Hammerstein-Wiener

Nonlinear state space with lower triangular structure

Dynamic NL closed loop

Covers complex non-fading memory behavior

shifting resonances, hysteresis, chaos, . . .

Can become unstable

Examples

NIIR and NARX

Closed loop block-oriented systems

Nonlinear state space

Users choice: white box - black box models

White models

- Dedicated: new model for new problem
- Expensive
- Compact
- Provide physical insight

Black box models

- Generic methodology
- Behavior modeling
- Exploding number of parameters
- Can provide intuitive insight

Users choice: white box - black box models

White models: physical models

Estimate value physical parameters

Smoke-grey models: semi-physical modeling

Natural selection of the variables

Steel-grey models: linearization based models

Models depend on working point and nature of excitation

Slate-grey models: block oriented models

Structural insight can be injected

Black models: universal approximators

Volterra, NARX, Nonlinear state space

Pit-black models: nonparametric smoothing

Black box models complexity

Keep the exploding number of parameters under control

Regularization

- Sparse solutions

 - Force parameters to zero

 - Brute force

- Smooth solutions

 - Impose smoothness

 - Number of parameters not changed

Data driven structure retrieval

- Decouple multivariate nonlinear function $p = f(q)$

- Search for a natural basis

- Reduction from combinatorial to linear grow complexity



Regularization: impose smoothness on Volterra kernel

Model


$$y_0(t) = \sum_0^{n_1} g_1(\tau) u(t-\tau) + \sum_0^{n_2} \sum_0^{n_2} g_\alpha(\tau_1, \tau_2) u(t-\tau_1) u(t-\tau_2) + \dots$$

Cost

$$V = \frac{1}{N} \sum_{t=1}^N (y(t) - y_{mod}(t, \theta))^2 + [\theta_1^T \theta_2^T] \begin{bmatrix} P_1^{-1} & 0 \\ 0 & P_2^{-1} \end{bmatrix} \begin{bmatrix} \theta_1 \\ \theta_2 \end{bmatrix}$$

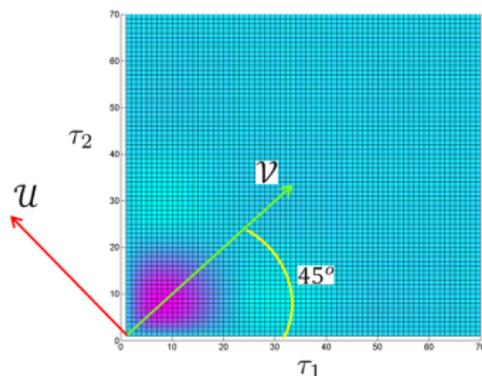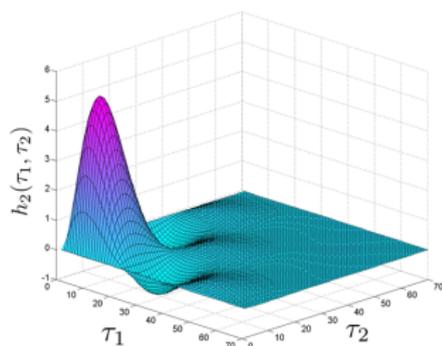

Example: Volterra model wrist-brain sensorimotor system⁴

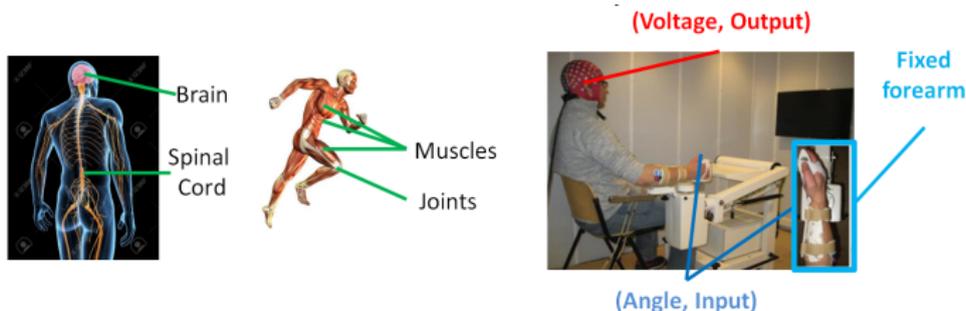

Experiment Design


Random odd multisine [1, 3, 5, 7, 9, 11, 13, 15, 19, 23]Hz
Averaged over 210 periods
7 Realizations

Model

2nd degree Volterra kernel
Fixed delay 20 ms
Memory length 130 ms (33 samples)

⁴ Acknowledgement G. Birpoutsoukis (VUB), M. Vlaar, F. Van der Helm and A. Schouten (TU Delft)

Example: Volterra model wrist-brain sensorimotor system

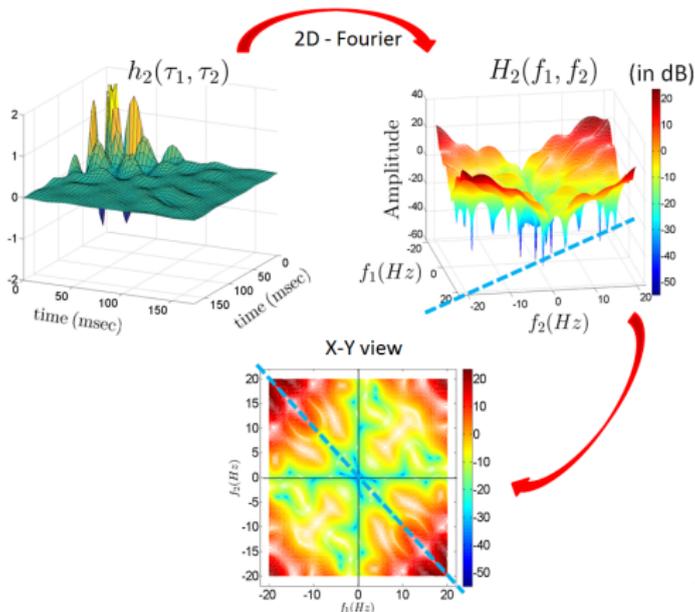

Results

Linear kernel 10% VAF (Variance Accounted For)

2nd degree Volterra model 45% VAF

2nd degree Volterra model 60% VAF on improved experiment

high-pass system

Black box models complexity

Keep the exploding number of parameters under control

Regularization

- Sparse solutions

 - Force parameters to zero

 - Brute force

- Smooth solutions

 - Impose smoothness

 - Number of parameters not changed

Data driven structure retrieval

- Decouple multivariate nonlinear function $p = f(q)$

- Search for a natural basis

- Reduction from combinatorial to linear growth complexity


Data driven structure retrieval: decoupling⁵

Multivariate nonlinear function $q = f(p)$

Decouple

$$q = W\mathbf{g}(V^T p)$$

$$\mathbf{g}_i = g_i(x_i), i = 1, \dots, r \text{ with } x = V^T p$$

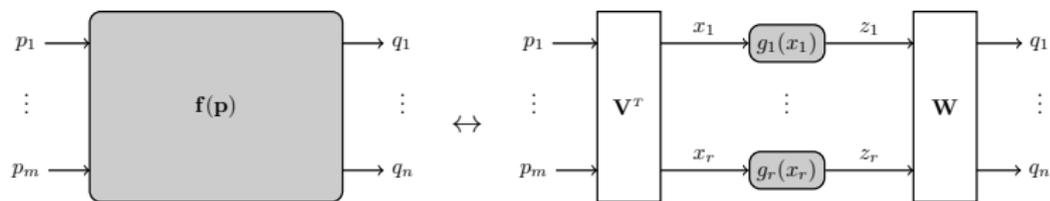

$$O(m^d)$$

$$O(rd)$$

⁵ Acknowledgement D. Philippe, M. Ishteva, K. Tiels (VUB)


Decoupling: example

$$q_1 = f_1(p_1, p_2)$$

$$= 54p_1^3 - 54p_1^2p_2 + 8p_1^2 + 18p_1p_2^2 + 16p_1p_2 - 2p_2^3 + 8p_2^2 + 8p_2 + 1$$

$$q_2 = f_2(p_1, p_2)$$

$$= -27p_1^3 + 27p_1^2p_2 - 24p_1^2 - 9p_1p_2^2 - 48p_1p_2 - 15p_1 + p_2^3 - 24p_2^2 - 19p_2 - 3$$

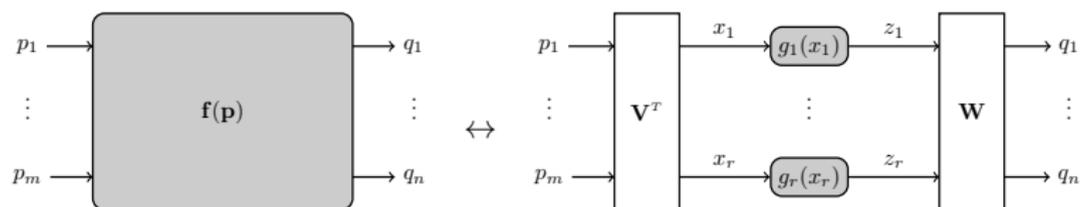

$$\begin{bmatrix} q_1 \\ q_2 \end{bmatrix} = \begin{bmatrix} 1 & 2 \\ -3 & -1 \end{bmatrix} \begin{bmatrix} 2x_1^2 - 3x_1 + 1 \\ x_2^3 - x_2 \end{bmatrix}, \quad \text{with} \quad \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} = \begin{bmatrix} -2 & -2 \\ 3 & -1 \end{bmatrix} \begin{bmatrix} p_1 \\ p_2 \end{bmatrix}$$

Decoupling: from complexity control to model reduction

Complexity control

Number of parameters

Full model $O(n^d)$

Decoupled model $O(rd)$

Force all $g_i(x) = g(x), \forall i$

$$q = W\mathbf{g}(V^T p)$$


$$\mathbf{g}_i = g(x_i), i = 1, \dots, r \text{ with } x = V^T p$$

Model reduction

Reduce number of branches

Balance complexity versus model errors

Decoupling: Link with Neural Networks

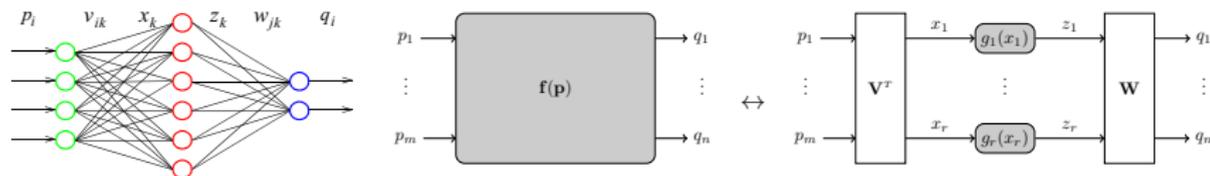

Neural network

Activation functions (red circles) prior user choice

Example: sigmoids, Gaussian bells, ReLU functions

Parameters tuned on the data

Decoupled model

Nonlinear functions set by the data

Nonparametric or parametric representation

Outline

Why is nonlinear SI so involved?

Linear or nonlinear SI? A users decision

The lead actors in SI

► **Linear identification in the presence of nonlinear distortions**

► More on the Best Linear Approximation (BLA)

Extensive case study

The system

The data

Linear models

Nonlinear models

From black box to highly structured models

Conclusions

Outline

Why is nonlinear SI so involved?

Linear or nonlinear SI? A users decision

The lead actors in SI

Linear identification in the presence of nonlinear distortions

- ▶ Nonlinear SI: Extensive case study

 - The system

 - The data

 - Linear models


 - Nonlinear models

 - From black box to highly structured models

Conclusions


Forced Duffing Oscillator: Initial nonparametric analysis

Nonlinear distortion analysis

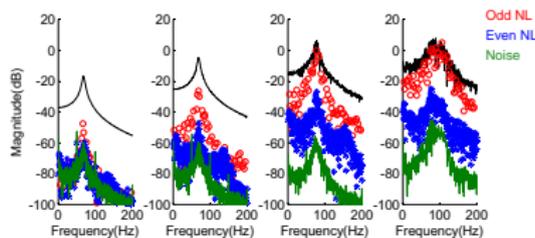


Conclusion: nonlinear distortions dominate noise

FRF measurement

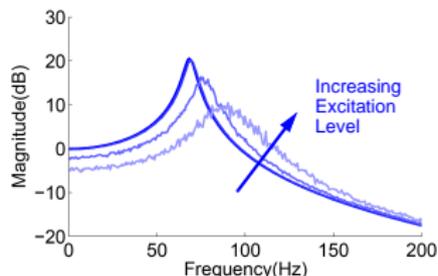



Conclusion: Nonlinear feedback model needed

Forced Duffing Oscillator: the data⁶


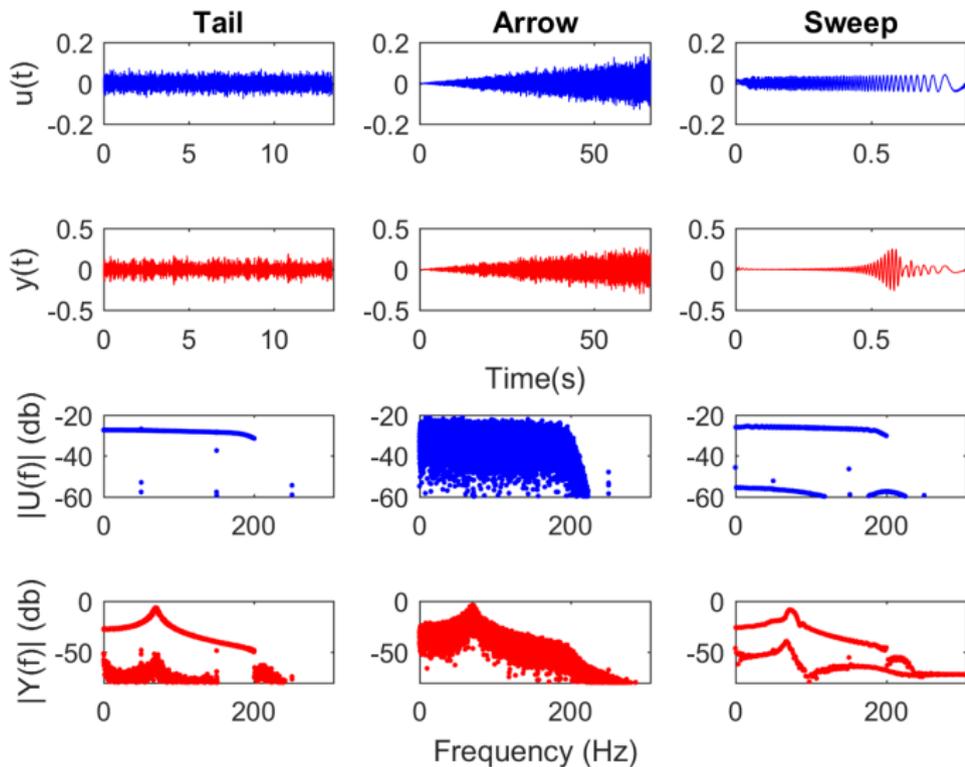


⁶Data available on <http://www.nonlinearbenchmark.org> (Silverbox Benchmark)


Forced Duffing Oscillator: linear models

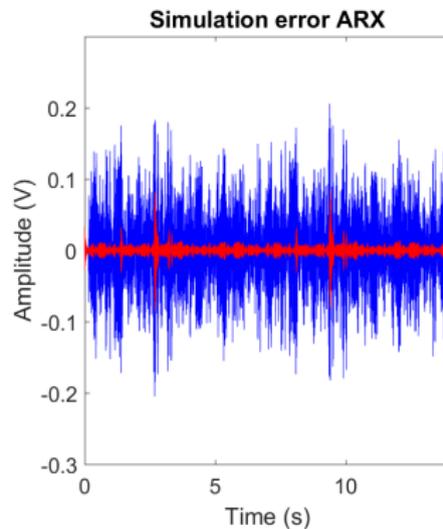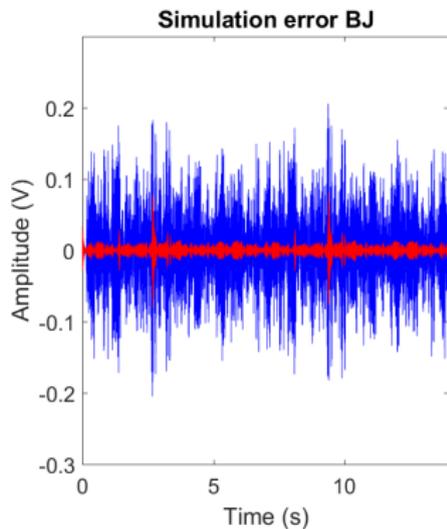

Forced Duffing Oscillator: linear models

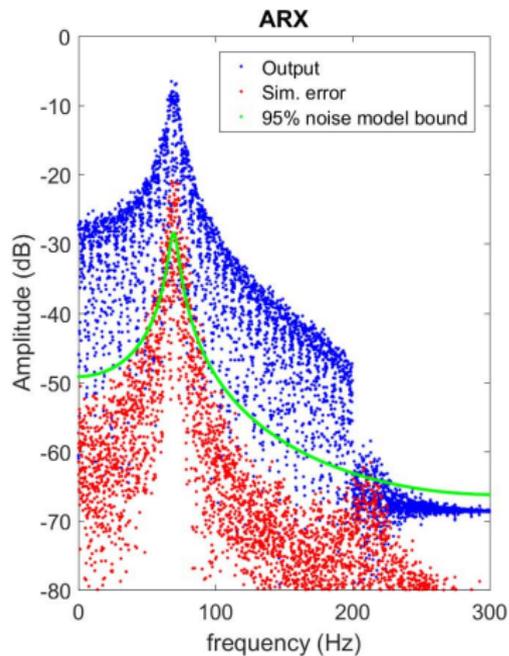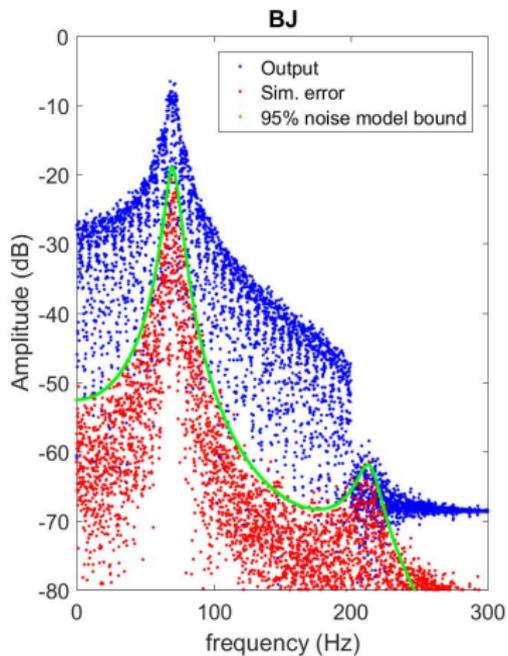

Forced Duffing Oscillator: linear models

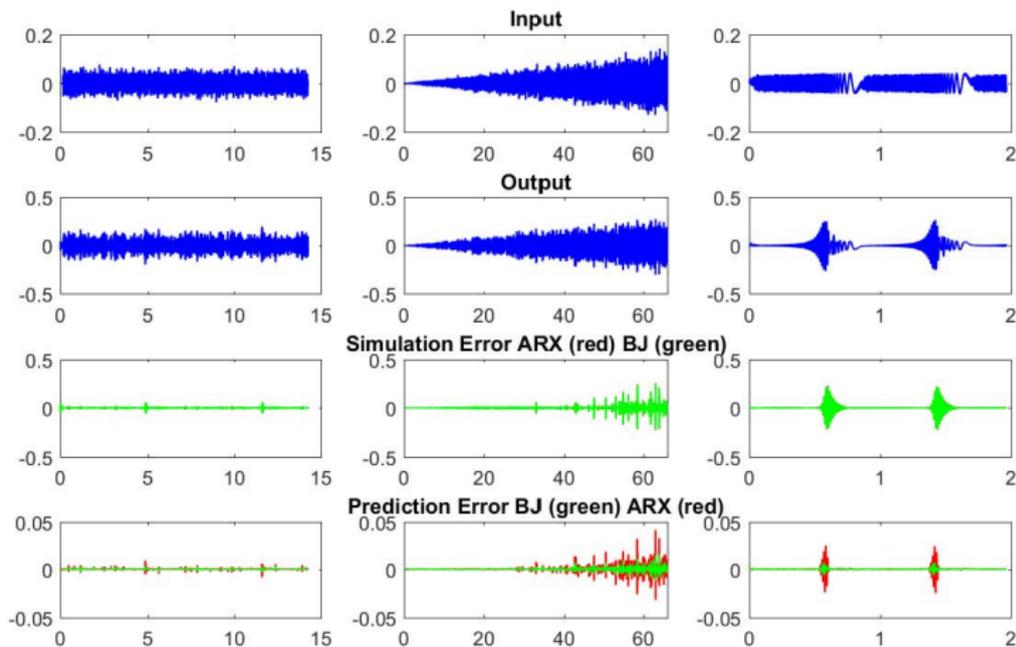


Forced Duffing Oscillator: from linear to nonlinear models

NARX

$$y(t) = P(u(t), u(t-1), u(t-2), y(t-1), y(t-2))$$

P Polynomial degree 3

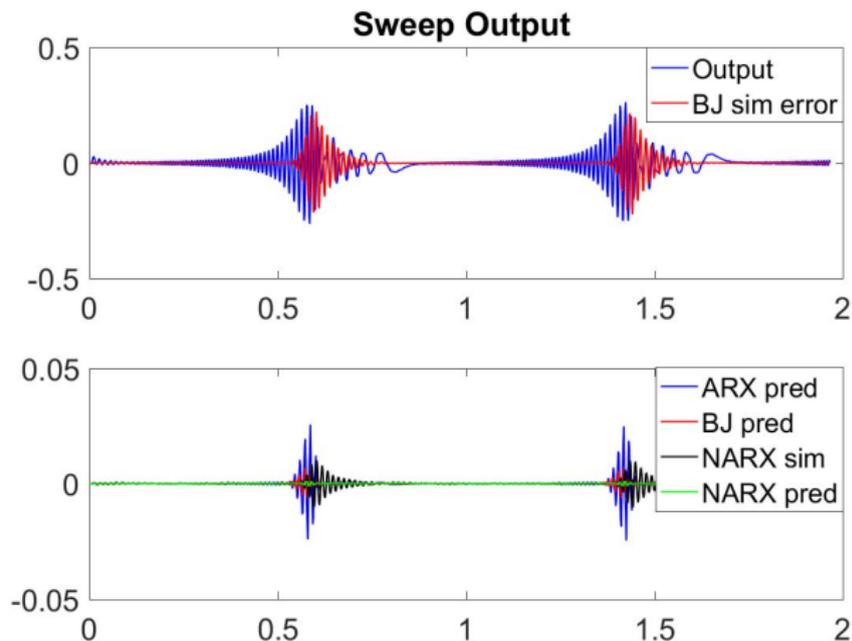


Forced Duffing Oscillator: black box nonlinear state space model⁷

Nonlinear State space

2 states

Polynomial degree 3

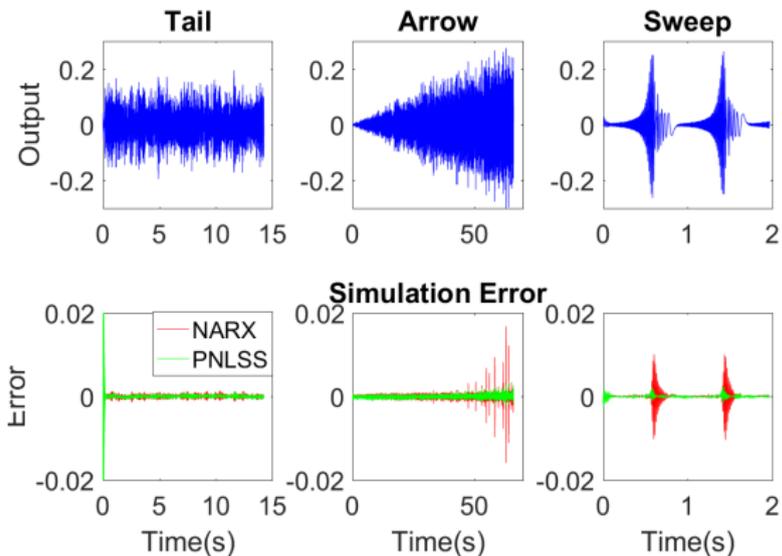


⁷ Acknowledgement K. Tiels (University of Uppsala)

Forced Duffing Oscillator: from black box to highly structured models⁸

$$\begin{bmatrix} x_1(k+1) \\ x_2(k+1) \end{bmatrix} = A \begin{bmatrix} x_1(k) \\ x_2(k) \end{bmatrix} + Bu(k) + \begin{bmatrix} f_1(x_1(k), x_2(k), u(k)) \\ f_2(x_1(k), x_2(k), u(k)) \end{bmatrix}$$
$$y(k) = C \begin{bmatrix} x_1(k) \\ x_2(k) \end{bmatrix} + Du(k)$$

f polynomial degree 3

Decouple $f(x_1(k), x_2(k), u(k))$

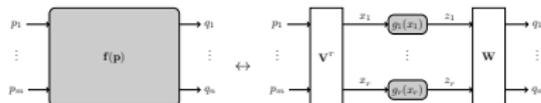


⁸ Acknowledgement J. Decuyper (VUB)

Forced Duffing Oscillator: Decoupled Model

4 branches

Polynomial degree 3 \rightarrow 5


	BLA	NLSS	Decoupled
RMS error	12%	0.49%	0.40%
n_{θ_L}	5	5	5
$n_{\theta_{NL}}$	0	30	12

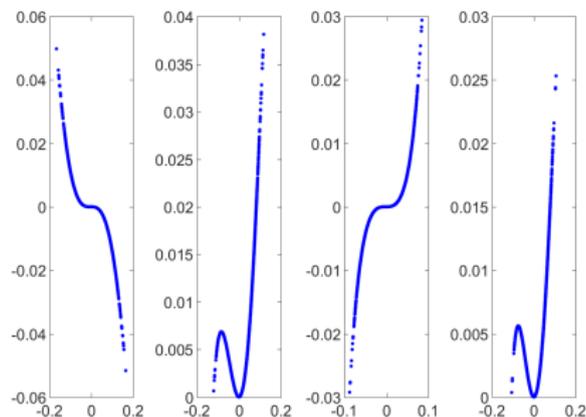


Forced Duffing Oscillator: Decoupled + Equal Branches

Impose all branches are equal


	BLA	NLSS	Decoupled	Equal Branches
RMS error	12%	0.49%	0.40%	0.40%
n_{θ_L}	5	5	5	5
$n_{\theta_{NL}}$	0	30	12	6

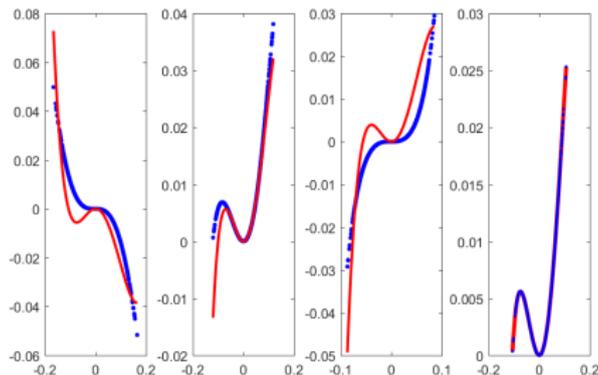

Forced Duffing Oscillator: Decoupled + Equal Branches

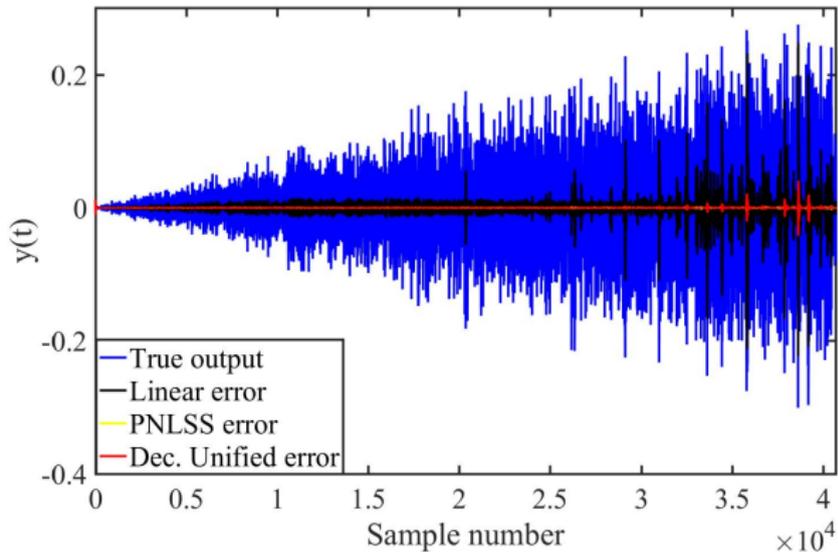

Forced Duffing Oscillator: Decoupled, Equal + Single Branch

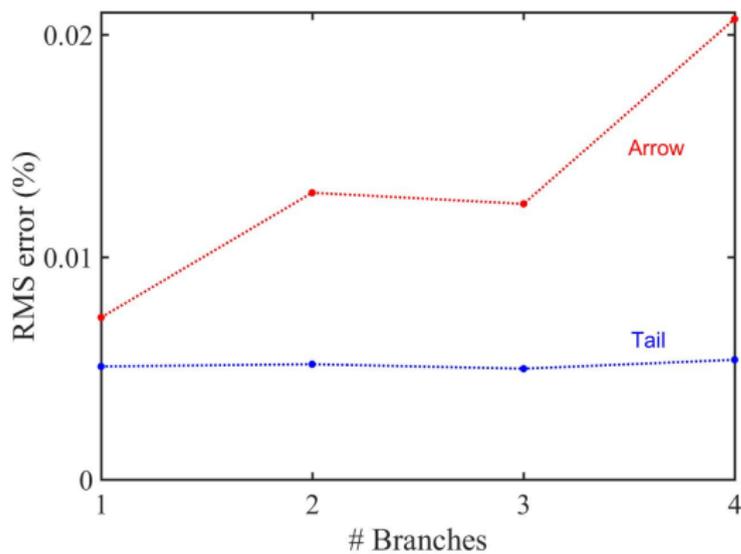


Forced Duffing Oscillator: Decoupled, Equal, Single Branch

$$\begin{bmatrix} x_1(k+1) \\ x_2(k+1) \end{bmatrix} = A \begin{bmatrix} x_1(k) \\ x_2(k) \end{bmatrix} + Bu(k) + \begin{bmatrix} w_1 \\ w_2 \end{bmatrix} g(p)$$

$$y(k) = C \begin{bmatrix} x_1(k) \\ x_2(k) \end{bmatrix} + Du(k)$$

$$p = v_1 x_1(k) + v_2 x_2(k) + v_3 u(k)$$

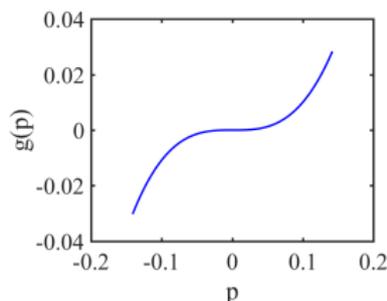

Forced Duffing Oscillator: Final model

Black box

Data driven structure retrieval

Single branch

$$\begin{bmatrix} x_1(k+1) \\ x_2(k+1) \end{bmatrix} = A \begin{bmatrix} x_1(k) \\ x_2(k) \end{bmatrix} + Bu(k) + \begin{bmatrix} w_1 \\ w_2 \end{bmatrix} g(p)$$

$$y(k) = C \begin{bmatrix} x_1(k) \\ x_2(k) \end{bmatrix} + Du(k)$$




$$p = v_1 x_1(k) + v_2 x_2(k) + v_3 u(k)$$

Forced Duffing Oscillator: Final model

$$\begin{bmatrix} x_1(k+1) \\ x_2(k+1) \end{bmatrix} = A \begin{bmatrix} x_1(k) \\ x_2(k) \end{bmatrix} + Bu(k) + \begin{bmatrix} w_1 \\ w_2 \end{bmatrix} g(p)$$

$$y(k) = C \begin{bmatrix} x_1(k) \\ x_2(k) \end{bmatrix} + Du(k)$$

$$p = v_1 x_1(k) + v_2 x_2(k) + v_3 u(k)$$

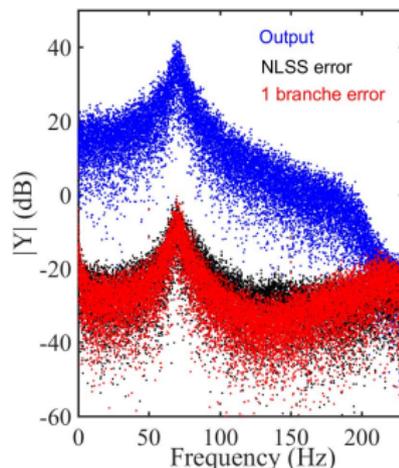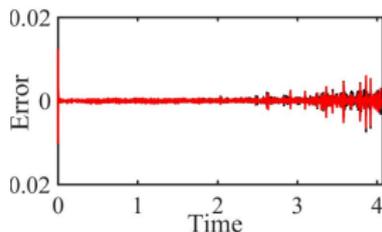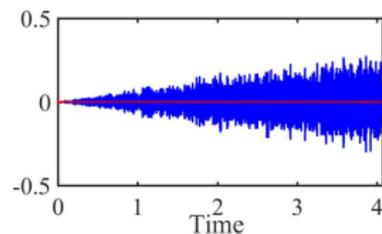

Conclusions

Why is nonlinear SI so involved?

- From hyperplane to manifold
- Model errors
- Process noise

Linear or nonlinear SI? A users decision

- Nonparametric distortion analysis
- Guidance model structure selection

The lead actors in SI


- Impact model errors on Experiment, Model, Cost Function

Data driven insight

- Structure retrieval
- Model reduction

Nonlinear System Identification

A USER-ORIENTED ROAD MAP

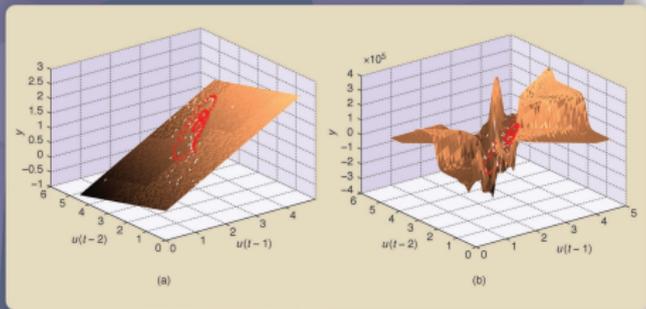

JOHAN SCHOUKENS and LENNART LJUNG

Nonlinear system identification is an extremely broad topic, since every system that is not linear is nonlinear. That makes it impossible to give a full overview of all aspects of the field. For this reason, the selection of topics and the organization of the discussion are strongly colored by the personal journey of the authors in this nonlinear universe.


The identification of linear dynamic systems started in the late 1950s. Zadeh [1] prioritized the need for a well-developed system identification framework at the very outset, followed by early overviews of the field [2]. A series of books established the field [3]–[7]. Linear system identification presented many successes, and data-driven modeling became an enabling factor in modern design methods. Nonlinear system identification [8]–[29] began when linear system identification [6], [7], [30] failed to

address users' questions. The real world is nonlinear and time varying, and, in some applications, these aspects cannot be ignored (see Figure 1). Therefore, linear models are imprecise or do not reproduce essential aspects of system behavior. This article is focused on nonlinear system identification. Overviews of time-varying system identification are given in [31] and the references therein.

Nonlinear behavior appears in many engineering problems. In mechanical engineering, nonlinear stiffness, damping, and interconnections influence ground vibration tests of airplanes and satellites, resulting in resonance frequencies and dampings that vary with the excitation level (see Figure 2, [32], and [33]). In telecommunications, power amplifiers are pushed into a nonlinear operation regime to improve power efficiency. Distillation columns exhibit nonlinear dynamic behavior. Many biological systems (for example, the eyes, ears, and sense of touch) first apply a nonlinear compression (known as the *Weber-Fechner law*) to cover the very large dynamic range of the inputs.


▶ return

Digital Object Identifier 10.1109/MCS.2019.2938123
Date of current version: 23 November 2019

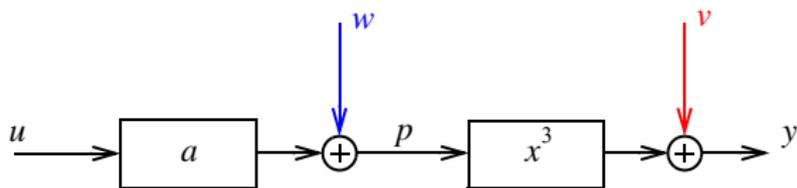

$$\hat{a}_{1,2} = \operatorname{argmin}_a \sum_{t=1}^N \|y(t) - [au(t)]^3\|^2$$

$$\hat{a}_3 = \operatorname{argmin}_a \sum_{f \in F} \|\sqrt[3]{y(t)} - au(t)\|^2$$

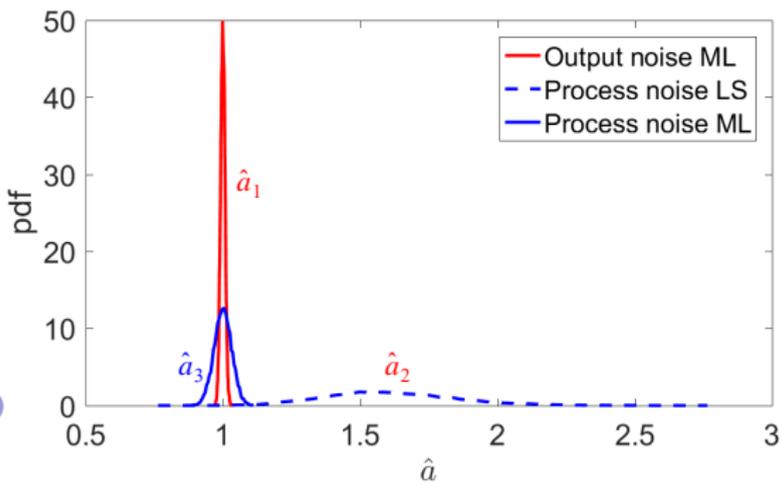


▶ return

Noise model, prior analysis periodic excitation

Estimate $\sigma_U^2(k)$, $\sigma_Y^2(k)$ and $\sigma_{YU}^2(k)$

Additional information: the signals are periodic

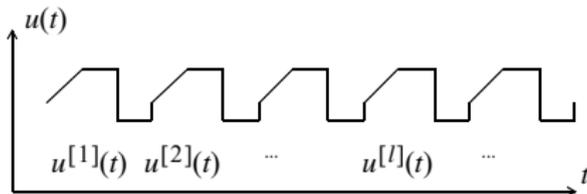

$$\hat{U}(k) = \frac{1}{M} \sum_{l=1}^M U^{[l]}(k), \quad \hat{Y}(k) = \frac{1}{M} \sum_{l=1}^M Y^{[l]}(k),$$

$$\hat{\sigma}_U^2(k) = \frac{1}{M-1} \sum_{l=1}^M |U^{[l]}(k) - \hat{U}(k)|^2 \quad \text{and} \quad \hat{\sigma}_Y^2(k) = \frac{1}{M-1} \sum_{l=1}^M |Y^{[l]}(k) - \hat{Y}(k)|^2$$

$$\hat{\sigma}_{YU}^2(k) = \frac{1}{M-1} \sum_{l=1}^M (Y^{[l]}(k) - \hat{Y}(k)) \overline{(U^{[l]}(k) - \hat{U}(k))}$$

Noise model, prior analysis periodic excitation

Properties

consistency: $M = 4$ periods are enough

efficiency:

$M = 6$ periods are enough

$$\text{'loss' in efficiency } C_{\theta\text{SML}} = \frac{M-2}{M-3} C_{\theta\text{ML}}$$

normality: $M = 7$ is enough

Recent results


2 periods + overlapping windows are enough

See:

Welch Method Revisited: Nonparametric Power Spectrum Estimation Via Circular Overlap
Barbe, K.; Pintelon, R.; Schoukens, J.
IEEE TRANSACTIONS ON SIGNAL PROCESSING, Vol. 58, pp. 553-565, 2010

Frequency analysis nonlinear distortions

Impact DC component

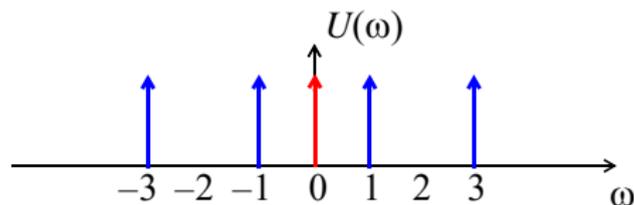

▶▶ return

	No DC	DC
ω	-3 -1 1 3	-3 -1 0 1 3
u	-3 -1 1 3	-3 -1 0 1 3
u^2	0 1-1 3-3 2 1+1 3-1 ...	1 1+0 3 3+0 ...
u^3	1 1+1-1 3-1-1 3 1+1+1 3+1-1 ...	0 1+0-1 2+0-2 2 3+0-1 2+1+0 ...

Snow-White Models

$$x(t+1) = f(x(t), u(t), w(t))$$

$$y(t) = h(x(t), u(t)) + v(t)$$

$v(t), w(t)$ sequences of independent random variables.

f, h obtained from physical insight

Off-White Models

Model depends on physical parameters θ with unknown value

$$x(t+1) = f(x(t), u(t), w(t), \theta)$$

$$\hat{y}(t|\theta) = h(x(t), u(t), \theta) + v(t)$$

f, h parameterized on θ

$\hat{y}(t|\theta)$ predicted output for parameter value θ

Steel-Grey Models: Semi-Physical Modelling

Using qualitative reasoning rather than formal equations

Example: electrical motor

acceleration $\frac{d}{dt}\omega \sim T_e - T_f - T_L$

electrical torque $T_e \sim i$

friction torque $T_f \sim \omega$

load torque $T_L \sim \omega$

current $i \sim u - u_{bef}$

u applied input voltage

back electromotive force $u_{bef} \sim \omega$

$$\theta_1 \frac{d}{dt}\omega(t) + \theta_2 \omega(t) = u(t)$$

Steel-Grey Models: Semi-Physical Modelling

Nonlinear transformations of the measured data

Example: heat production in resistor

$$P(t) = Ri(t)^2$$

$$i(t) \sim u(t)$$

Use $u^2(t)$ as input of linear model $P = f(u^2(t))$

Steel-Grey Models: Linearization-Based Models

Best Linear Approximation of a nonlinear system: BLA

$$G_{BLA} = \arg \min_G E \left\{ |y_0(t) - G(q)u(t)|^2 \right\}$$

Local linear models

$$\hat{y}(t|\theta, Z^{t-1}) = \sum_{i=1}^d \rho(p(t), p_i) \hat{y}_i(t|\theta, Z^{t-1})$$

ρ is a weighting or *validity function*

p_i regime variable: the local working point

$\hat{y}_i(t|\theta, Z^{t-1})$ local linear model around p_i


Block-Oriented Models




Hammerstein



Wiener

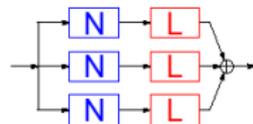

Parallel Hammerstein




Parallel Wiener




Hammerstein-Wiener




Wiener-Hammerstein

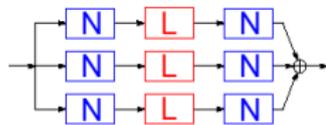


Parallel Hammerstein-Wiener

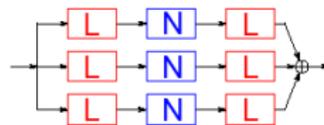

Parallel Wiener-Hammerstein



Wiener-Hammerstein Feedback



Nonlinear LFR Feedback

N: static nonlinear block

L: dynamic linear block

Black-Box Models: Universal Approximators

Nonlinear state space models

$$\begin{aligned}x(t+1) &= f(x(t), u(t), \theta), \\ \hat{y}(t|\theta) &= h(x(t), \theta).\end{aligned}$$

Special case: NARX Nonlinear Autoregressive Exogenous models

states $x(t)$: finite number of past inputs and outputs

$$x(t) = [y(t-1), \dots, y(t-n_a), u(t-1), \dots, u(t-n_b)]^T$$

regressors $\varphi(t) = x(t)$

NARX model

$$\hat{y}(t|\theta) = h(\varphi(t), \theta)$$

Pit-Black Models: Nonparametric Smoothing

Model: $y(t) = g(\varphi(t)) + e(t)$

Regressors $\varphi(t)$: n -dimensional vector of past observations


Assumption: model surface $[y, \varphi(t)]$ is smooth

Model

$$\hat{g}(\varphi_*) = \sum_{i=1}^N y_i w(|\varphi_* - \varphi_i|)$$

Kernel w : weights the observations in neighborhood of φ_*

Basic idea regularization: pull parameters to zero $\tilde{\theta} = \lambda \hat{\theta}$

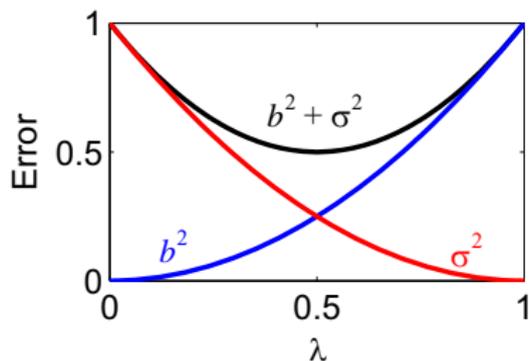

true parameter: $\theta_0 = 1$

unbiased estimate: $\hat{\theta}$

bias $b = 0$ and variance $\sigma^2 = 1$

scaled estimator: $\tilde{\theta} = \lambda \hat{\theta}$

bias $\tilde{\theta}$: $b = (1 - \lambda)$ and variance $\tilde{\theta}$: $\sigma_{\tilde{\theta}}^2 = \lambda^2$


MSE: $b^2 + \sigma_{\tilde{\theta}}^2 = (1 - \lambda)^2 + \lambda^2$

▶ return

Extended cost function

$$\hat{\theta}_N = \operatorname{argmin}_{\theta} \sum_{t=1}^N \|y(t) - \hat{y}(t|\theta)\|^2 + \theta^T P^{-1} \theta$$

Basic idea regularization: pull parameters to zero $\tilde{\theta} = \lambda \hat{\theta}$

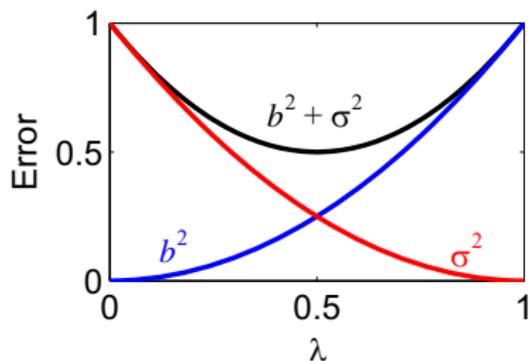

true parameter: $\theta_0 = 1$

unbiased estimate: $\hat{\theta}$

bias $b = 0$ and variance $\sigma^2 = 1$

scaled estimator: $\tilde{\theta} = \lambda \hat{\theta}$

bias $\tilde{\theta}$: $b = (1 - \lambda)$ and variance $\tilde{\theta}$: $\sigma_{\tilde{\theta}}^2 = \lambda^2$

MSE: $b^2 + \sigma_{\tilde{\theta}}^2 = (1 - \lambda)^2 + \lambda^2$

▶ return

Extended cost function

$$\hat{\theta}_N = \operatorname{argmin}_{\theta} \sum_{t=1}^N \|y(t) - \hat{y}(t|\theta)\|^2 + \theta^T P^{-1} \theta$$

Basic idea prediction methods

Model the errors using past output observations

Simulation model: $\hat{y}_s(t) = G(u, \theta)$

Simulation error: $v_s(t) = y(t) - \hat{y}_s(t)$

If simulation error $v_s(t)$ is correlated

$v_s(t)$ can be predicted from past values v_s^{t-1}

Correlation error model: $v_s(t) = H(q)e(t)$

$\hat{v}_p(t|t-1) = (1 - H^{-1}(q))v_s(t)$

Use $\hat{v}_p(t|t-1)$ to improve $\hat{y}_s(t)$

$\hat{y}_p(t) = \hat{y}_s(t) + \hat{v}_p(t|t-1)$

$$\hat{y}_p(t) = G(u, \theta) + (1 - H^{-1}(q))v_s(t)$$

Best choice: Prediction of Simulation?

Simulation model

Goal: simulate the system output for new inputs

No output data available

Prediction model cannot be used

Use simulation model

Prediction model

Goal: give the best estimate for the next output

Past output data available

Prediction error is smaller than simulation error

Use prediction model

Best choice: Prediction of Simulation?

$v(t)$ dominated by measurement or sensor noise

$v(t)$ not related to process of interest

$v(t)$ should be eliminated

Use simulation model

$v(t)$ dominated by process noise

Process noise affects the process of interest

$v(t)$ should be part of the model

Use prediction model


$v(t)$ dominated by structural model errors

Structural model errors related to process of interest

$v(t)$ should be part of the model

Use prediction model

Example: Forced Duffing Oscillator

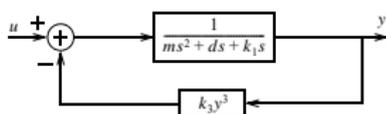


Simulation

$$\hat{y}_s(t) = b_0 u(t) + b_1 u(t-1) + b_2 u(t-2) - a_1 \hat{y}_s(t-1) - a_2 \hat{y}_s(t-2)$$




Prediction

$$\hat{y}_p(t) = b_0 u(t) + b_1 u(t-1) + b_2 u(t-2) - a_1 y(t-1) - a_2 y(t-2)$$

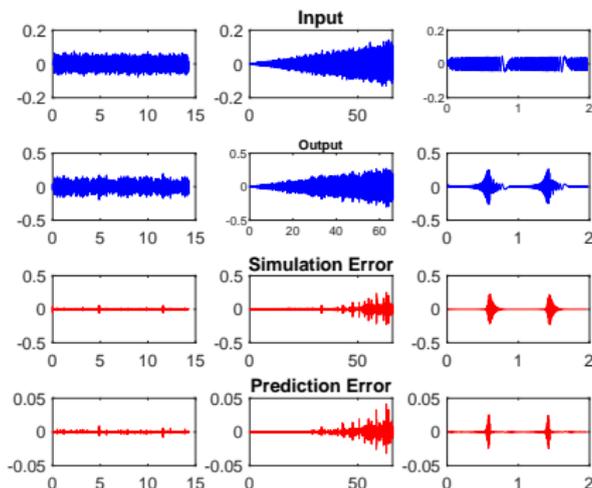

▶ return

Error plot

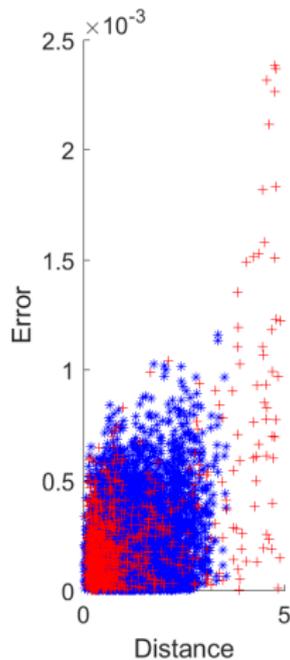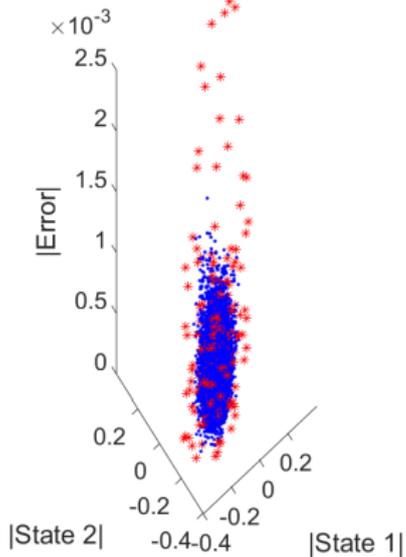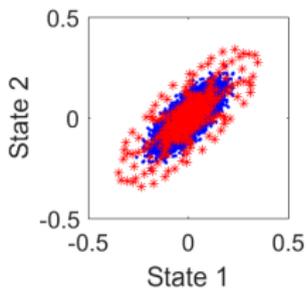


▶▶ return

Identification in the Presence of Model Errors

User Choices

- convergence criterion
- approximation method
- excitation


User choices: convergence criterion

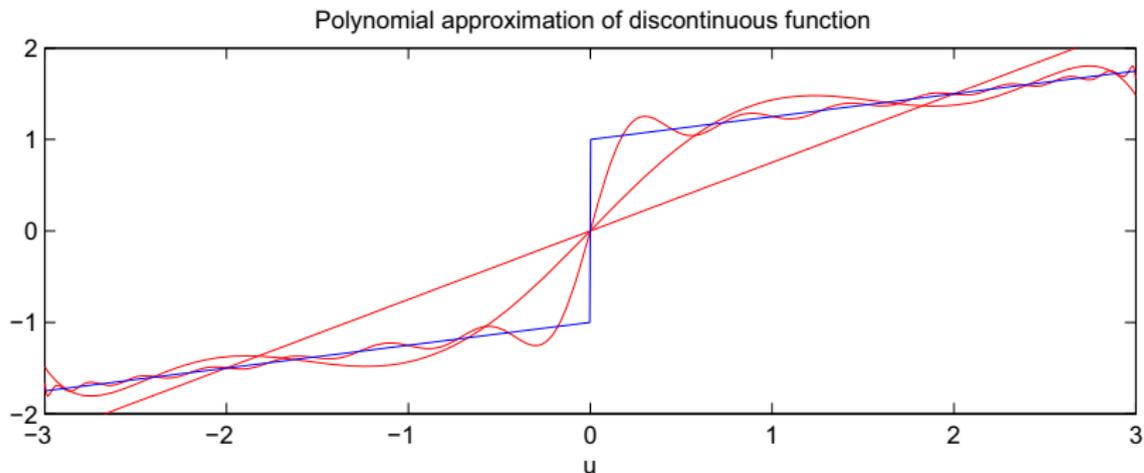

uniform convergence \neq point wise convergence


User choices: Approximation method

atan and its Taylor approximation atan and its LS approximation

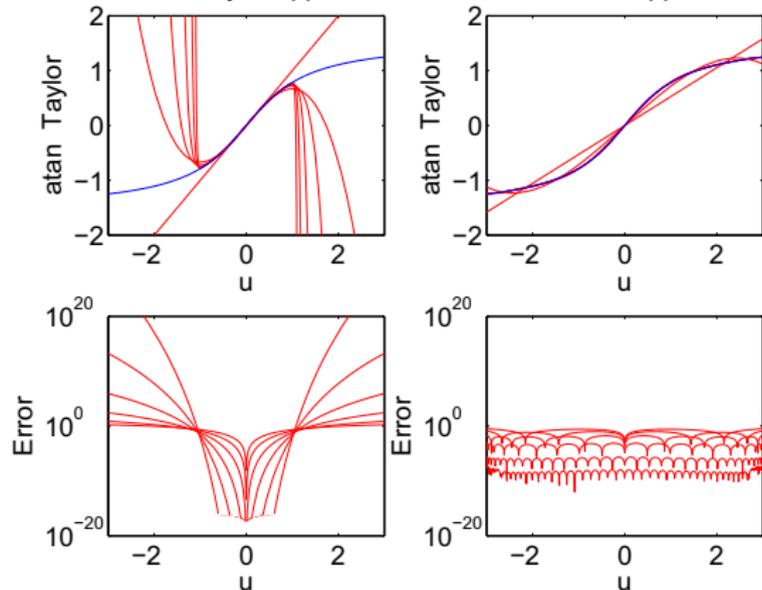


Taylor $>$ Least Squares


User choices: Excitation

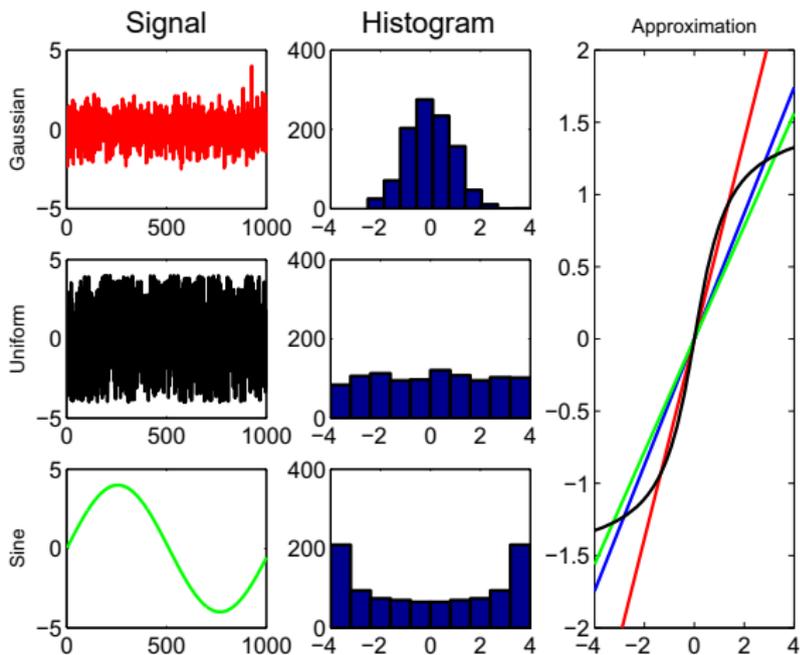


Class of excitation signals

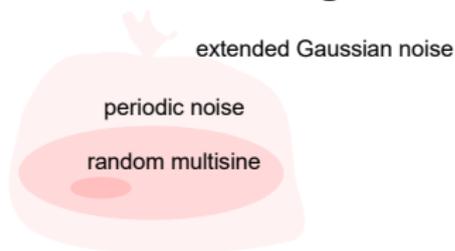

Gaussian noise



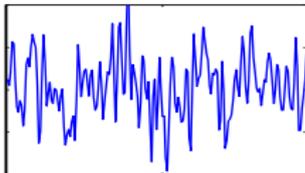


periodic noise

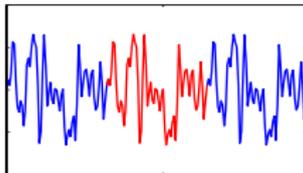


time

random multisine

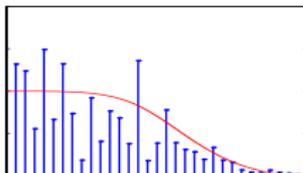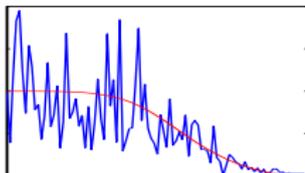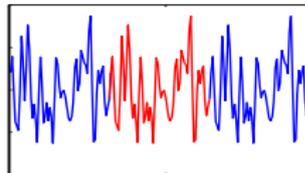

frequency

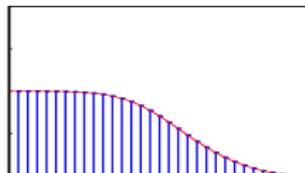

$$u(t) = \frac{1}{F} \sum_{k=1}^F A_k \cos(2\pi k f_0 t + \varphi_k)$$

▶▶ return

Design of discrete time periodic excitation: a sine

$$u(t) = U_1 \cos(2\pi f_0 t)$$

$$t = kT_s$$

$$k = 1, \dots, N$$


f_s : sample frequency

$f_0 = f_s/N$: fundamental frequency

$T_s = 1/f_s$: sample period

$T = 1/f_0$: period signal

$T = NT_s$, N samples in one period

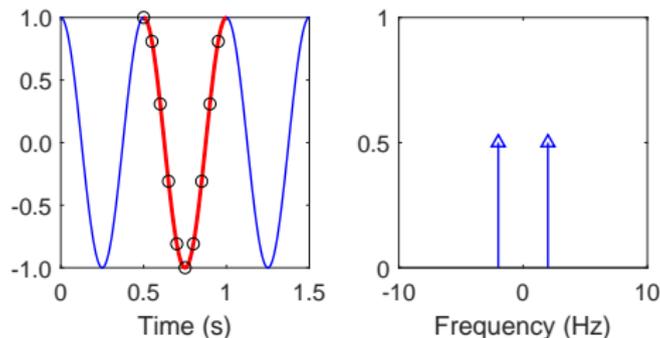

▶▶ return

Design multisine


$$u(t) = \sum_{k=1}^F U_k \cos(2\pi k f_0 t + \varphi_k)$$

$T = 1/f_0$: period signal

$f_0 = f_s/N$: frequency resolution

N samples in one period

Multisine Examples

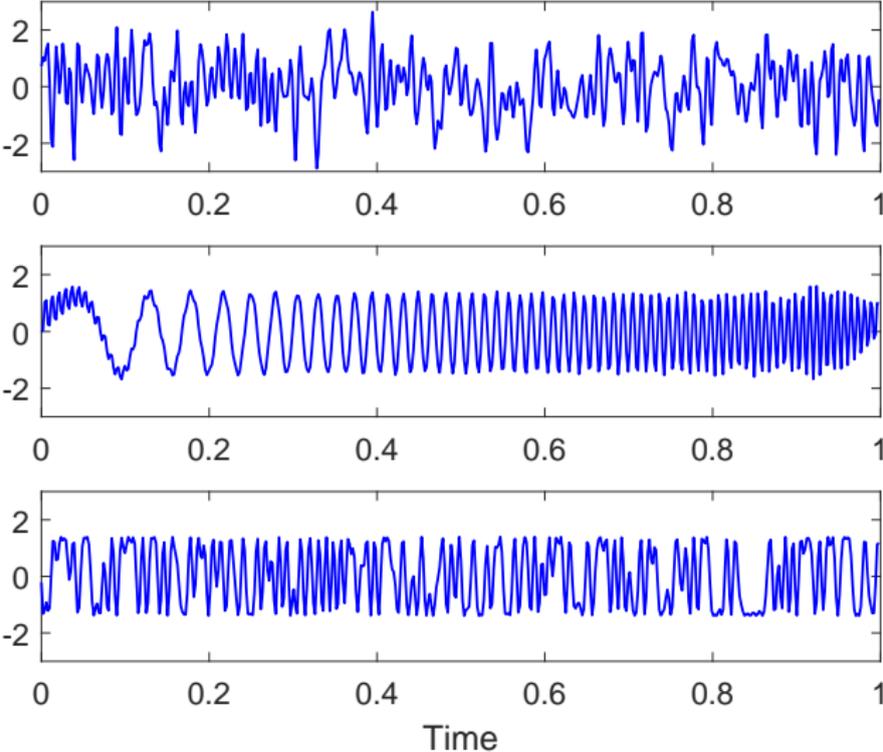

▶▶ return

User guidelines to design a multisine

Spectral resolution $f_0 = f_s/N$

miss no sharp resonances

Period length $N = f_s/f_0$

higher frequency resolution \rightarrow longer measurement time

Amplitude spectrum $U_k, k = 1, \dots, F$

cover the frequency band of interest

Phases φ_k

use random phases in $[0, 2\pi[$


Signal amplitude

cover the input amplitude range of interest

Number of periods

measure 3 or more periods

Volterra theory in a nut shell time domain

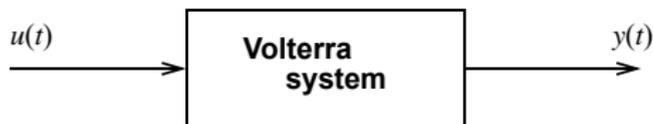

$$y(t) = \sum_{k=1}^{\infty} y^{[k]}(t)$$


with

$$y^{[1]}(t) = \int_{-\infty}^{\infty} u(\sigma_1)h_1(t - \sigma_1)d\sigma_1$$

$$y^{[2]}(t) = \iint_{-\infty}^{\infty} u(\sigma_1)u(\sigma_2)h_2(t - \sigma_1, t - \sigma_2)d\sigma_1d\sigma_2$$

...

Volterra theory in a nut shell multi dimensional frequency domain

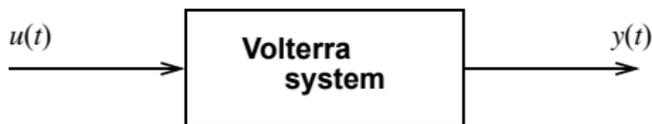

$$y(t) = \sum_{k=1}^{\infty} y^{[k]}$$

Define

$$y^{[2]}(t_1, t_2) = \iint_{-\infty}^{\infty} u(\sigma_1)u(\sigma_2)h_2(t_1 - \sigma_1, t_2 - \sigma_2)d\sigma_1d\sigma_2$$

Then

$$Y^{[2]}(\omega_1, \omega_2) = \iint_{-\infty}^{\infty} y^{[2]}(t_1, t_2)e^{-j\omega_1 t_1}e^{-j\omega_2 t_2}dt_1dt_2$$

Volterra theory in a nut shell collapsing the multi dimensional frequency domain

Inverse Fourier transform

$$y^{[2]}(t) = y^{[2]}(t_1, t_2) = \frac{1}{(2\pi)^2} \iint_{-\infty}^{\infty} Y^{[2]}(\omega_1, \omega_2) e^{j\omega_1 t_1} e^{j\omega_2 t_2} d\omega_1 d\omega_2 \text{ with } t = t_1 = t_2$$

or

$$y^{[2]}(t) = \frac{1}{(2\pi)^2} \iint_{-\infty}^{\infty} Y^{[2]}(\omega_1, \omega_2) e^{j(\omega_1 + \omega_2)t} d\omega_1 d\omega_2$$

Put

$$\omega = \omega_1 + \omega_2 \rightarrow \omega_2 = \omega - \omega_1, \text{ and } d\omega = d\omega_2$$

Then

$$y^{[2]}(t) = \frac{1}{(2\pi)^2} \iint_{-\infty}^{\infty} Y^{[2]}(\omega_1, \omega - \omega_1) d\omega_1 e^{j\omega t} d\omega = \frac{1}{2\pi} \int_{-\infty}^{\infty} Y^{[2]}(\omega) e^{j\omega t} d\omega$$

with

$$Y^{[2]}(\omega) = \int_{-\infty}^{\infty} y^{[2]}(\omega, \omega - \omega_1) d\omega_1$$

Volterra theory in a nut shell frequency domain relations

$$Y^{[n]}(\omega_1, \omega_2, \dots, \omega_n) = H^{[n]}(\omega_1, \omega_2, \dots, \omega_n)U(\omega_1)\dots U(\omega_n)$$

with

$$H^{[n]}(\omega_1, \omega_2, \dots, \omega_n) = \int \dots \int_{-\infty}^{\infty} h_n(t_1, t_2, \dots, t_n) e^{-j\omega_1 t_1} \dots e^{-j\omega_n t_n} dt_1 dt_2 \dots dt_n$$


Corresponding one-dimensional frequency representation

$$Y^{[n]}(\omega_1, \omega_2, \dots, \omega_n) \rightarrow Y(\omega_1 + \omega_2 + \dots + \omega_n)$$

$\omega_1 + \omega_2 + \dots + \omega_n$ indicates that contribution results from n^{th} degree NL

Volterra theory in a nut shell frequency domain relations for periodic signals

$$Y^{[n]}(\omega_1, \omega_2, \dots, \omega_n) = H(\omega_1, \omega_2, \dots, \omega_n)U(\omega_1)\dots U(\omega_n)$$

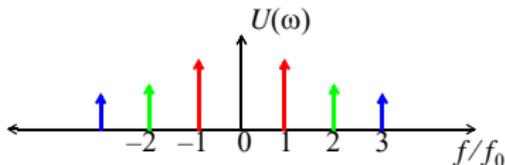

with

$$Y^{[2]}(\omega) = \int_{-\infty}^{\infty} y^{[2]}(\omega, \omega - \omega_1)d\omega_1 \rightarrow Y^{[2]}(k) = \sum_l y^{[2]}(l, k-l) = \sum_l H^{[2]}(l, k-l)U(l)U(k-l)$$

similar

$$Y^{[3]}(k) = \sum_{l_1} \sum_{l_2} \dots U(l_1)U(l_2)U(k-l_1-l_2)$$

Conclusion

$Y^{[3]}(k)$ sum over all combination $U(l_1)U(l_2)U(l_3)$ such that $l_1 + l_2 + l_3 = k$

Linear identification in the presence of nonlinear distortions

BLA: best linear approximation

User choices


- convergence criterion
- approximation method
- excitation

Class of nonlinear systems

Linear identification in the presence of nonlinear distortions

- Understanding the impact of nonlinear distortions
- Nonparametric identification: FRF measurements
- Parametric identification


User choices: convergence criterion

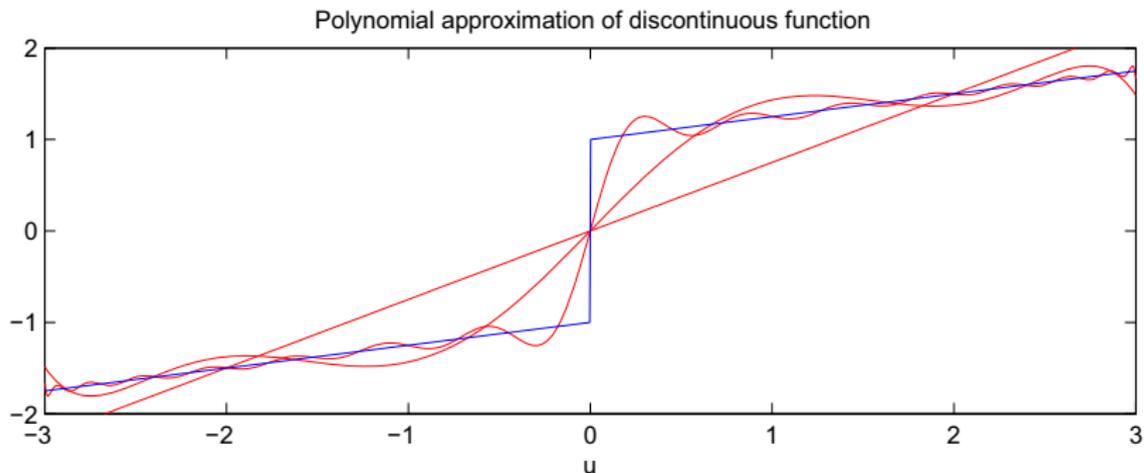

uniform convergence \neq point wise convergence


User choices: Approximation method

atan and its Taylor approximation atan and its LS approximation

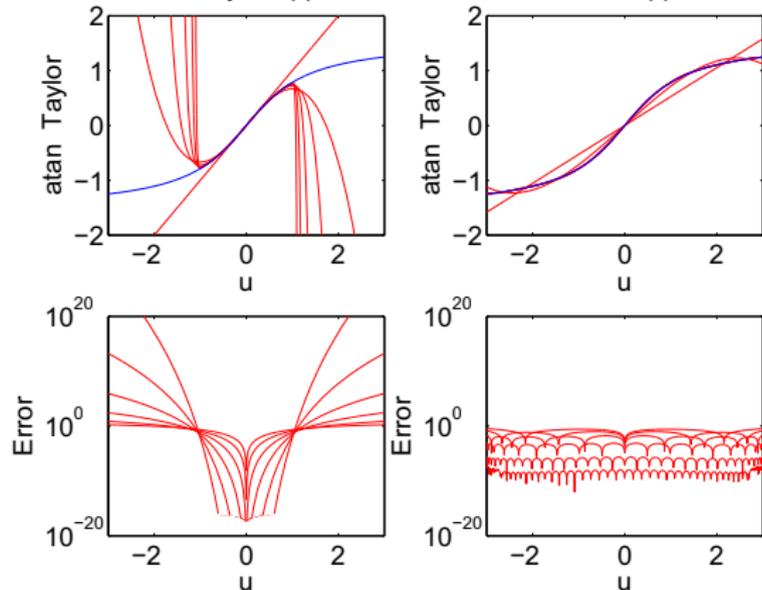


Taylor >< **Least Squares**


User choices: Excitation

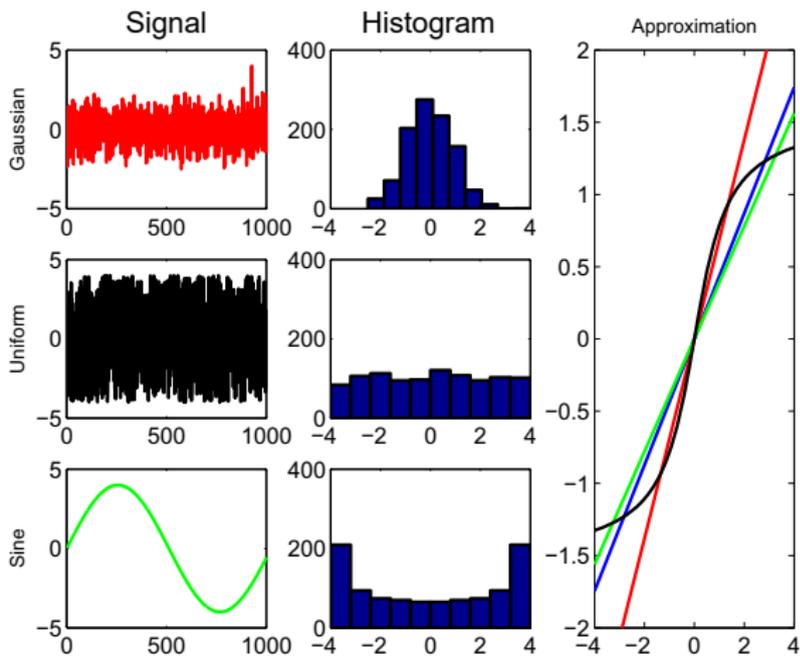


Class of excitation signals

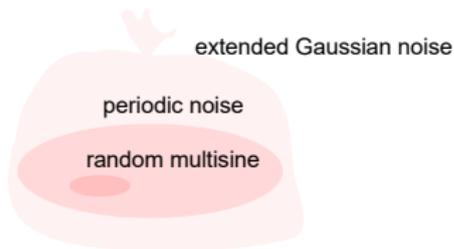

Gaussian noise



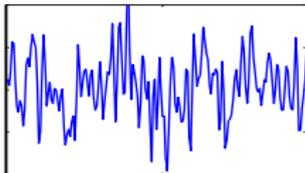


periodic noise

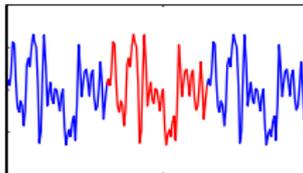


time

random multisine

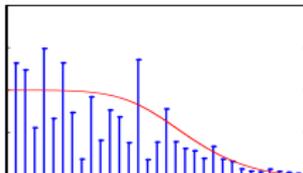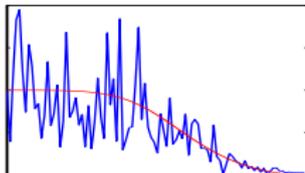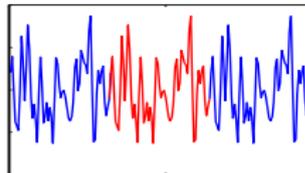

frequency

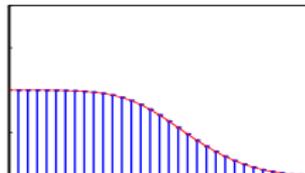

▶▶ return

$$u(t) = \frac{1}{F} \sum_{k=1}^F A_k \cos(2\pi k f_0 t + \varphi_k)$$

Linear identification in the presence of nonlinear distortions

BLA: best linear approximation

User choices


- convergence criterion
- approximation method
- excitation

Class of nonlinear systems


Linear identification in the presence of nonlinear distortions

- Understanding the impact of nonlinear distortions
- Nonparametric identification: FRF measurements
- Parametric identification

Class of nonlinear systems

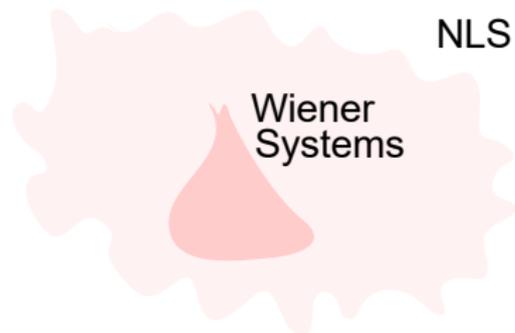

Wiener systems?

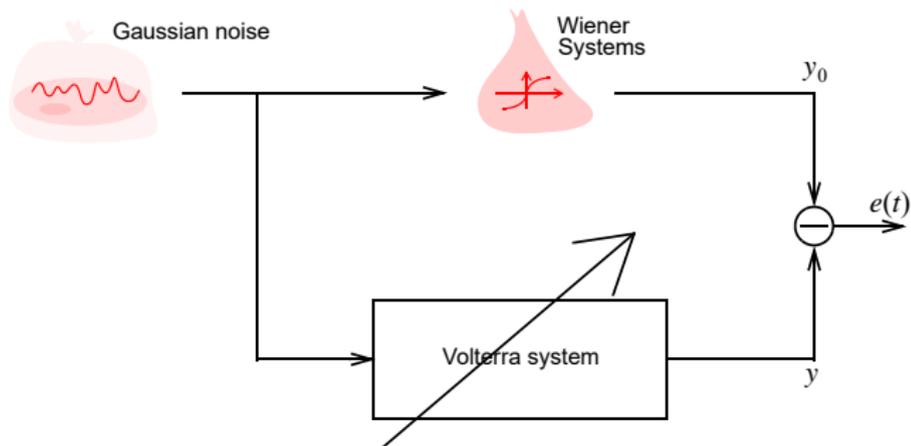

$$\mathcal{E}_u\{e^2_{RMS}\} \rightarrow 0$$

Major properties

- A periodic input \rightarrow a periodic output with the same period



- Approximates the output in mean squares sense

-  dynamic saturations
-  discontinuities
-  chaos

Linear identification in the presence of nonlinear distortions

BLA: best linear approximation

User choices


- convergence criterion
- approximation method
- excitation

Class of nonlinear systems

Linear identification in the presence of nonlinear distortions

- [Understanding the impact of nonlinear distortions](#)
- Nonparametric identification: FRF measurements
- Parametric identification


Understanding the impact of nonlinear distortions on the linear framework

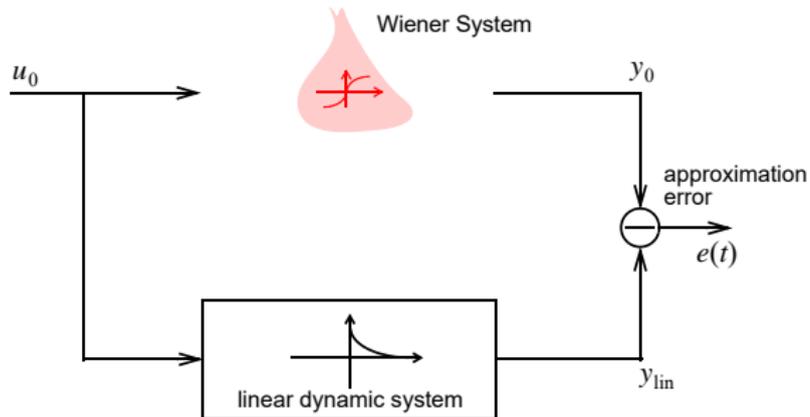


$$G_{BLA} = \arg \min_G E_U \{|Y - GU|^2\}$$

Behaviour of a nonlinear system


A linear system

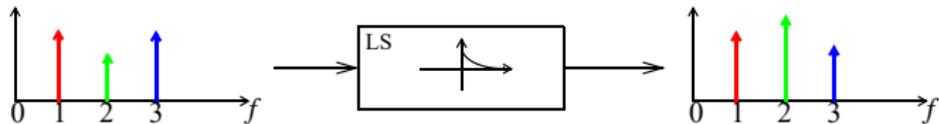

A Nonlinear system

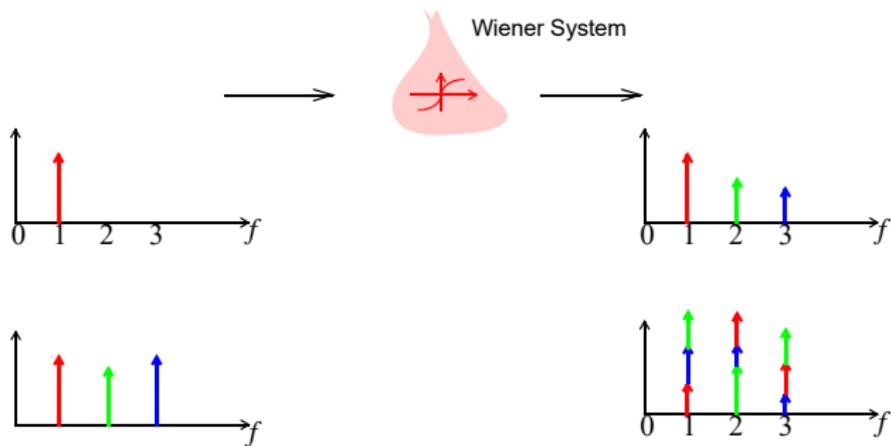

Behaviour of a nonlinear system

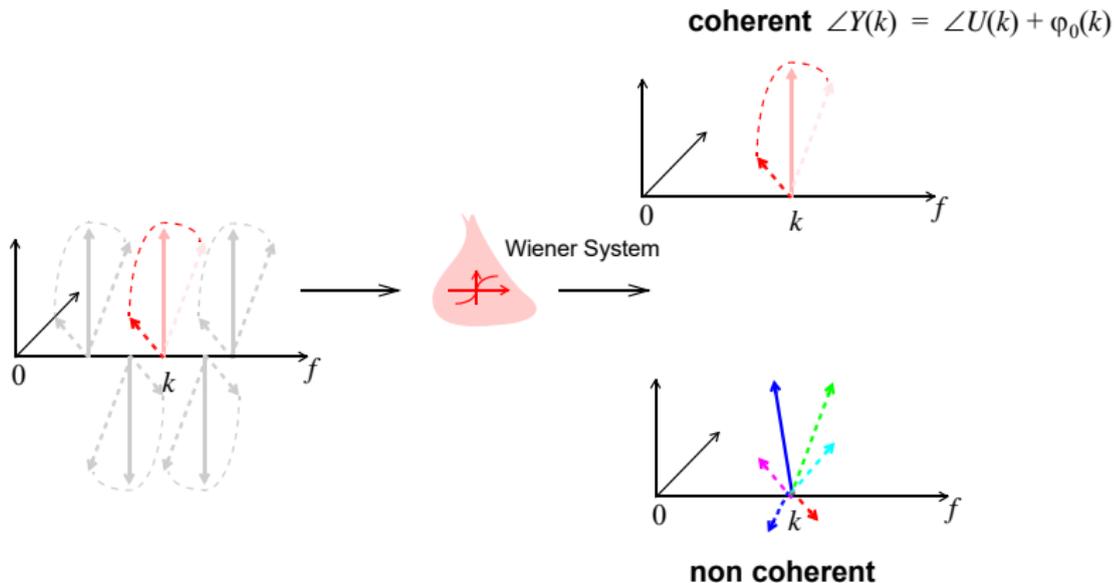

(non) Coherent contributions

Example: cubic contributions

$$Y^{(3)}(k) = \sum_{l_1} \sum_{l_2} H^{(3)}(l_1, l_2, k - l_1 - l_2) U(l_1) U(l_2) U(k - l_1 - l_2)$$

Frequency combinations s.t. $\angle U(l_1) U(l_2) U(k - l_1 - l_2) = \angle U(k)$?

Yes

$$U(k) U(-l) U(l) = U(k) |U(l)|^2 \rightarrow \text{coherent contribution}$$

NO

$$U(k-2) U(1) U(1) \rightarrow \text{non coherent contribution}$$

(non) Coherent contributions (Cont'd)

Example: quadratic contributions

$$Y^{[2]}(k) = \sum_{l_1} H^{[2]}(l_1, k - l_1) U(l_1) U(k - l_1)$$

Frequency combinations s.t. $\angle U(l_1)U(k - l_1) = \angle U(k)$?

Yes

$U(k)U(0)$ --> coherent contribution requires DC

No

$U(k - 1)U(1)$ --> non coherent contribution

(non) Coherent contributions

Conclusions

Put $U(0) = 0$

Even nonlinearities

always non coherent


Odd nonlinearities

coherent

+

non coherent contributions

Coherent output


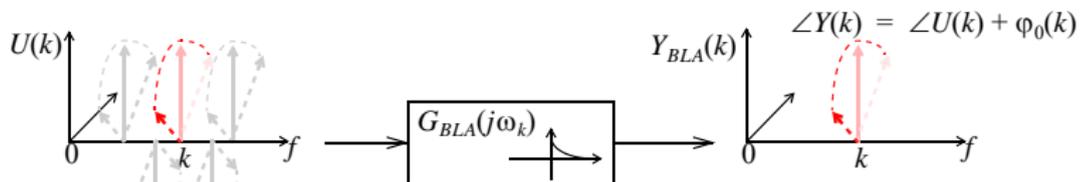


$$Y_{RBLA}(k) = G_{BLA}(j\omega_k)U(k)$$

$G_{BLA}(j\omega_k)$ is the best linear approximation

$G_{BLA}(j\omega_k)$ is a function of S_{UU}


Non coherent output

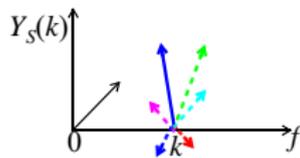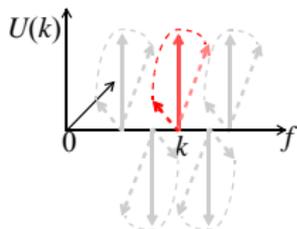

The phase of $Y_S(k)$ depends on $U(l)$ $l \neq k$

$Y_S(k)$ acts as a noise source

A new paradigm

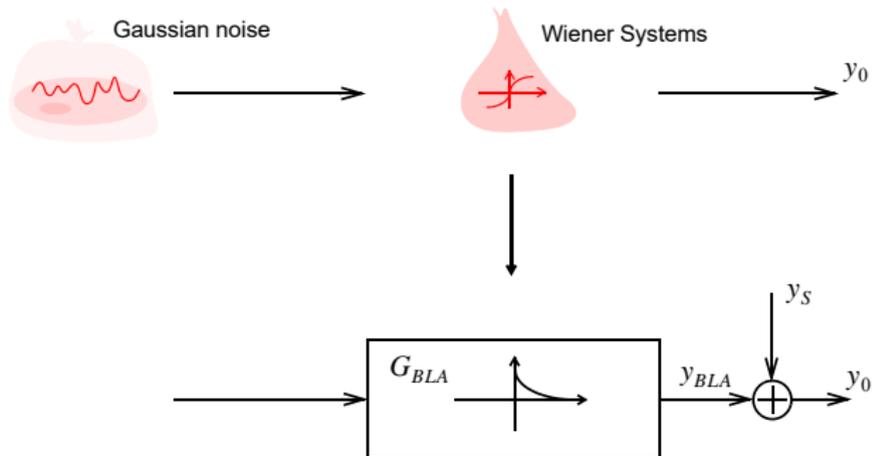

$$Y(k) = G_{BLA}(j\omega_k)U(k) + Y_S(k)$$

A 'new' paradigm

Properties

$$Y(k) = G_{BLA}(j\omega_k)U(k) + Y_S(k)$$

$G_{BLA}(j\omega_k)$ is the 'best linear approximation'

- smooth
- $O(N^0)$
- same for all excitations in the set (with same power spectrum)
- only odd nonlinearities contribute

$Y_S(k)$ is the 'nonlinear noise source'

- smooth power spectrum
- zero mean
- circular complex normally distributed
- $O(N^0)$
- same power spectrum for all excitations in the set
- even and odd nonlinearities contribute

zero mean circular complex normally distributed

$$x = a + jb \in \mathbb{C}$$

Zero mean circular complex: $E[x^2] \equiv 0$

$$E[(a + jb)^2] = E[a^2 - b^2 + 2jab] = 0 \quad \Rightarrow \quad E[a^2] = E[b^2] = \sigma^2 \text{ and } E[ab] = 0$$

Zero mean circular complex normally distributed: $E[x^n] \equiv 0$

x is a complex vector

- without a preferred direction
- no relation between amplitude and phase

Linear identification in the presence of nonlinear distortions

BLA: best linear approximation

User choices

- convergence criterion
- approximation method
- excitation

Class of nonlinear systems

Linear identification in the presence of nonlinear distortions

- Understanding the impact of nonlinear distortions
- Nonparametric identification: FRF measurements
- Parametric identification

Best Linear Approximation : Nonparametric measurement




The classic linear equations still hold

$$G_{BLA}(\omega) = \frac{S_{YU}(\omega)}{S_{UU}(\omega)}$$


$$\sigma_{G_{BLA}}^2(\omega) = |G_{BLA}(\omega)|^2 \frac{1 - \gamma^2(\omega)}{\gamma^2(\omega)}$$




Example : hardening spring

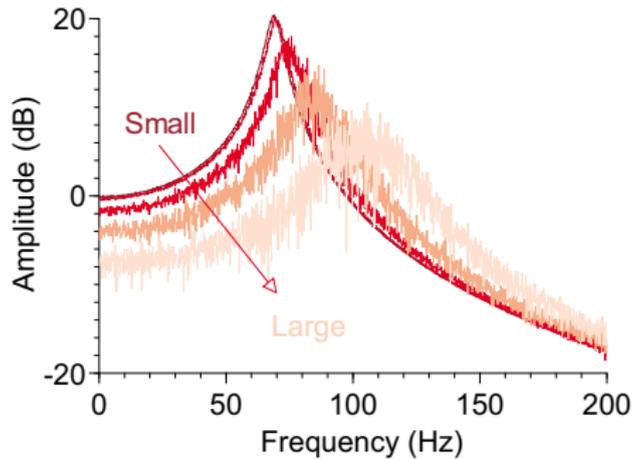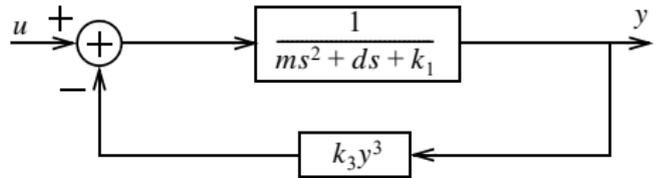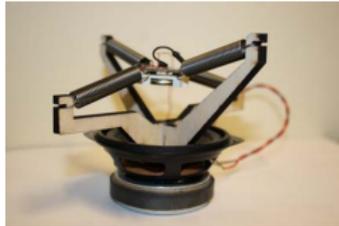

FRF-measurements in the presence of NL-distortions

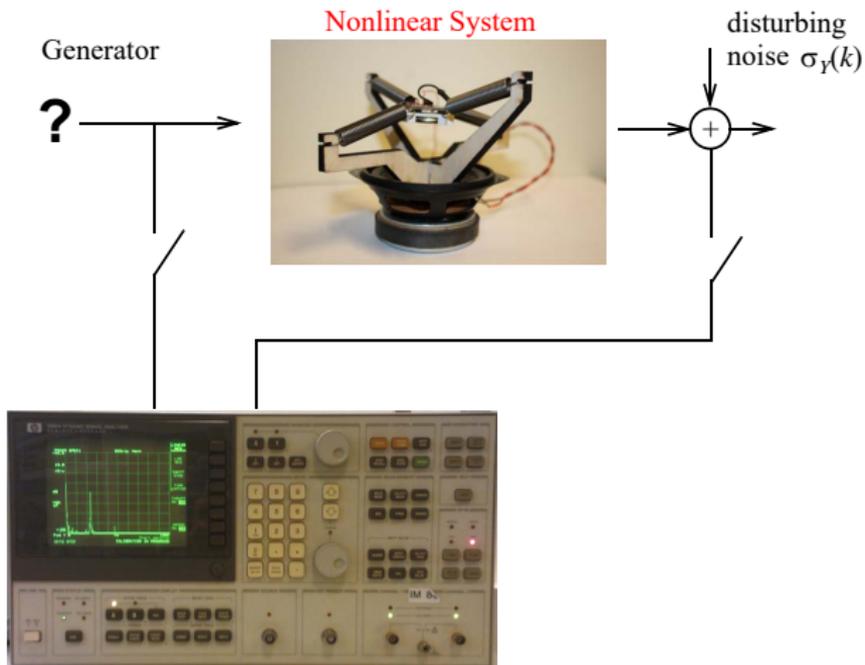

FRF-measurements in the presence of NL-distortions

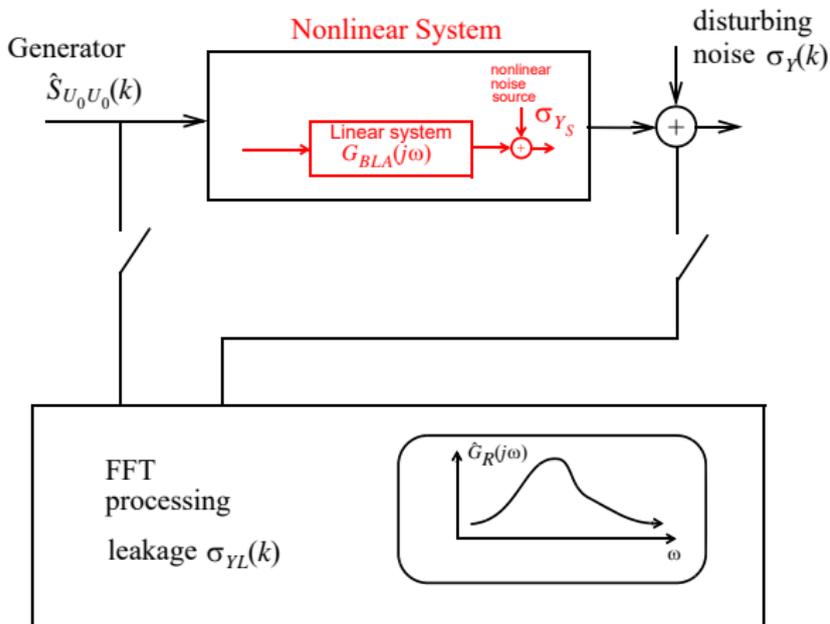


$$\sigma_{G_{BLA}}^2(k) = \frac{\sigma_{Y_L}^2(k) + \sigma_{Y_S}^2(k) + \sigma_Y^2(k)}{\hat{S}_{U_0 U_0}(k)}$$

FRF-measurements in the presence of NL-distortions (Cont'd)

$$\sigma_{G_{BLA}}^2(k) = \frac{\sigma_{Y_L}^2(k) + \sigma_{Y_S}^2(k) + \sigma_{Y}^2(k)}{\hat{S}_{U_0 U_0}(k)}$$

Avoid dips in $\hat{S}_{U_0 U_0}(k)$

deterministic signals \gg noise

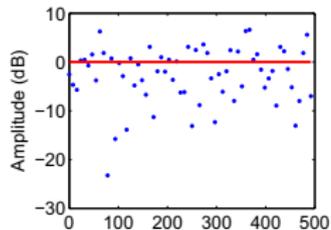


FRF-measurements in the presence of NL-distortions (Cont'd)

$$\sigma_{G_{BLA}}^2(k) = \frac{\sigma_{\hat{Y}_L}^2(k) + \sigma_{\hat{Y}_S}^2(k) + \sigma_{\hat{Y}}^2(k)}{\hat{S}_{U_0 U_0}(k)}$$

Avoid dips in $\hat{S}_{U_0 U_0}(k)$

deterministic signals \gg noise

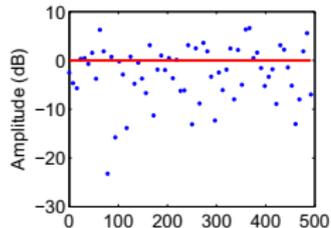

Reduction of the leakage errors $\sigma_{\hat{Y}_L}^2$


periodic signals

FRF-measurements in the presence of NL-distortions (Cont'd)

$$\sigma_{G_{BLA}}^2(k) = \frac{\sigma_{\hat{Y}_L}^2(k) + \sigma_{\hat{Y}_S}^2(k) + \sigma_{\hat{Y}}^2(k)}{\hat{S}_{U_0 U_0}(k)}$$


Avoid dips in $\hat{S}_{U_0 U_0}(k)$

deterministic signals \gg noise

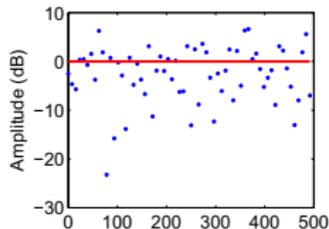

Reduction of the leakage errors $\sigma_{\hat{Y}_L}^2$

periodic signals


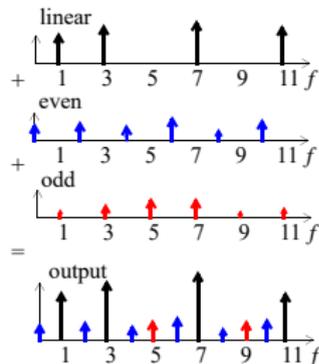


Reduction of the impact of nonlinear distortions $\sigma_{\hat{Y}_S}^2$


Odd excitations

▶ return


Hair dryer experiment

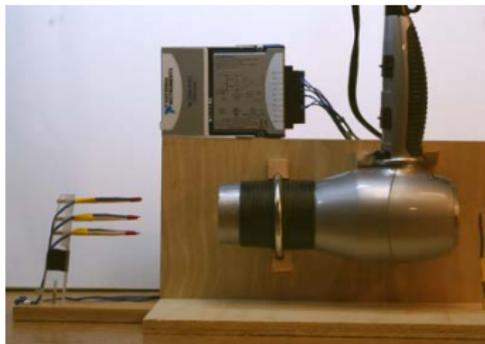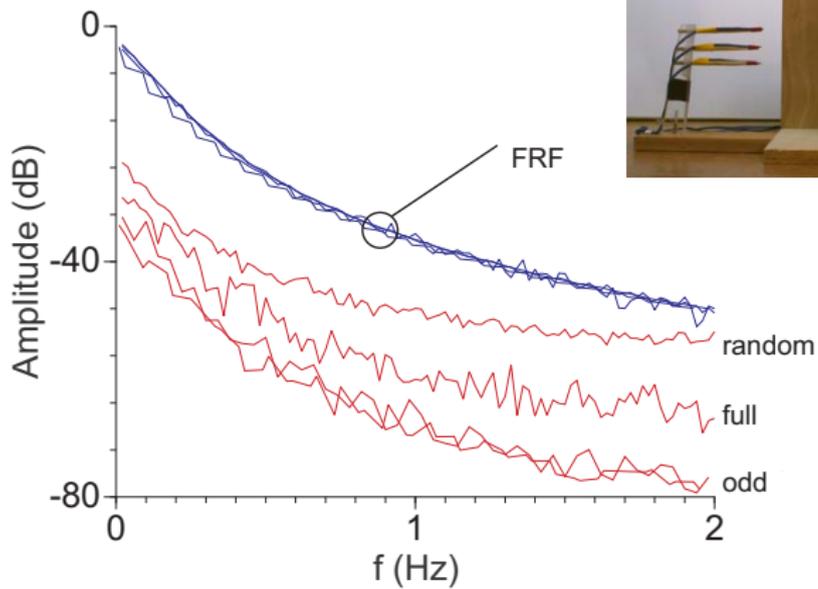

Example: F16-fighter measurements

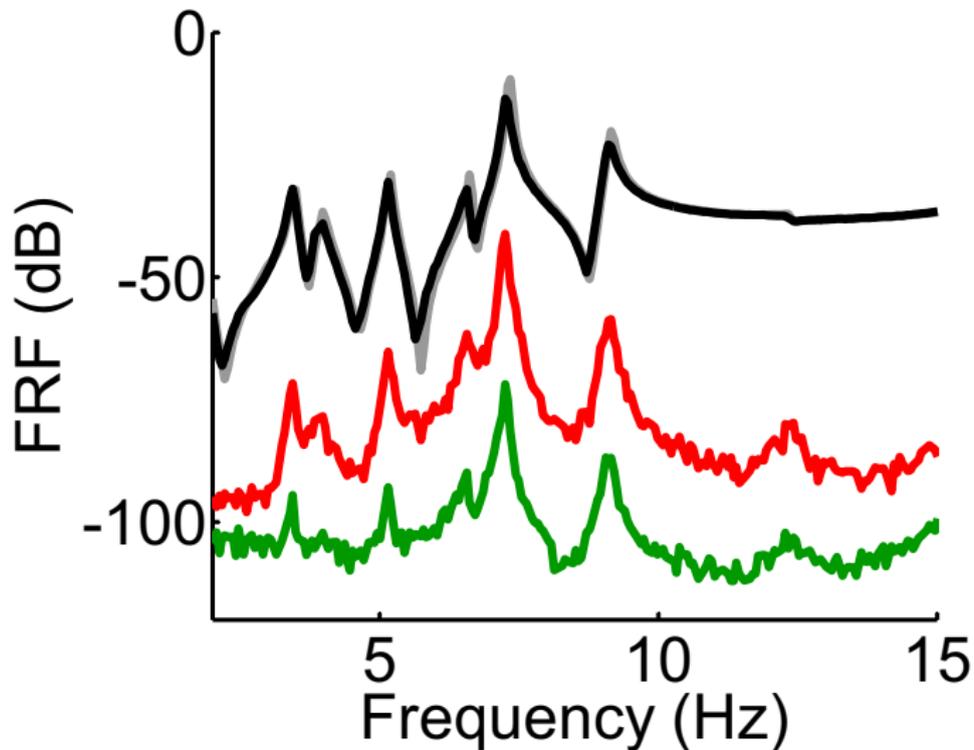

Example: zoom F16-fighter measurements

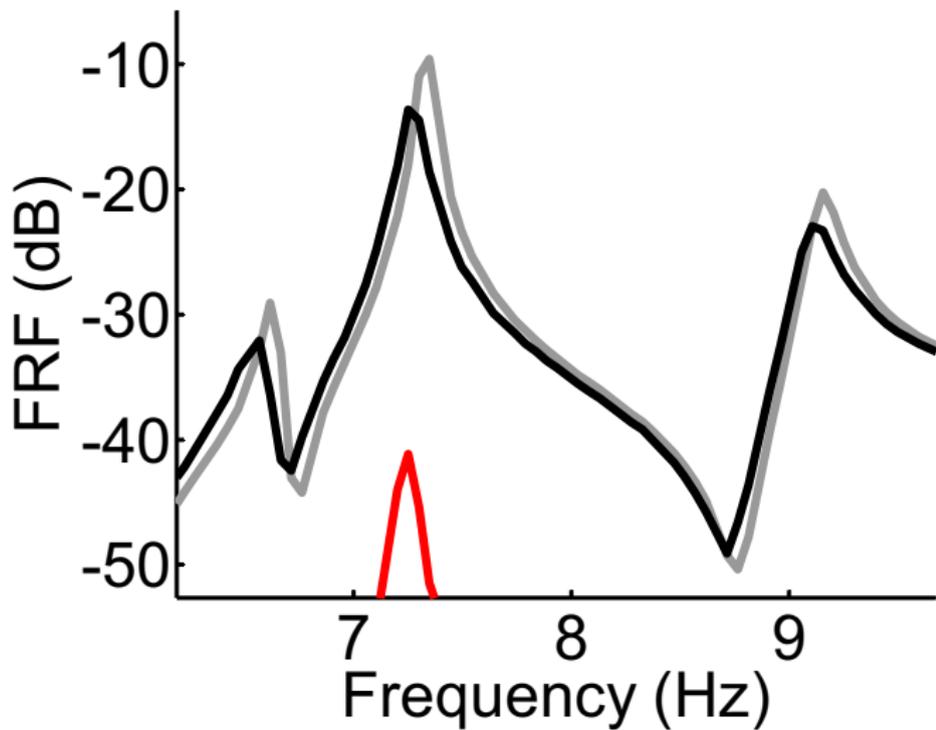

Linear identification in the presence of nonlinear distortions

BLA: best linear approximation

User choices


- convergence criterion
- approximation method
- excitation

Class of nonlinear systems

Linear identification in the presence of nonlinear distortions

- Understanding the impact of nonlinear distortions
- Nonparametric identification: FRF measurements
- [Parametric identification](#)

Best Linear Approximation: Parametric modelling

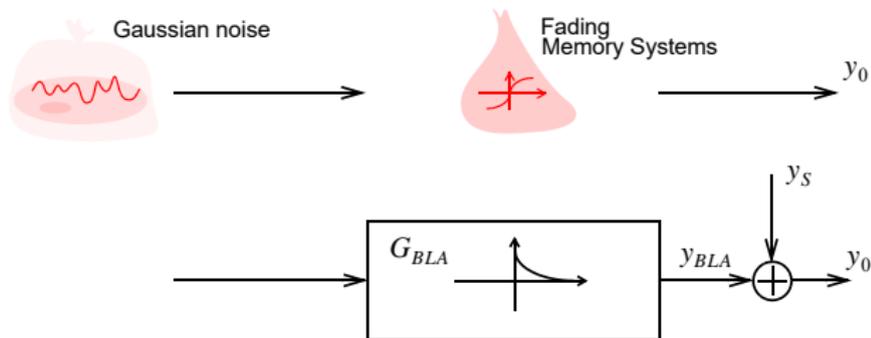

$$Y(k) = G_{BLA}(j\omega_k)U(k) + Y_S(k)$$

Goal: find a parametric model $G_{BLA}(j\omega, \theta)$ and its uncertainty bound

Best Linear Approximation : Parametric modelling

$$G_{BLA}(j\omega, \theta)$$

Linear identification framework




Consistent estimate

True model retrieved for large data sets


Uncertainty bounds are wrong

Nonlinear induced variance underestimated by factor 7 or more

Example

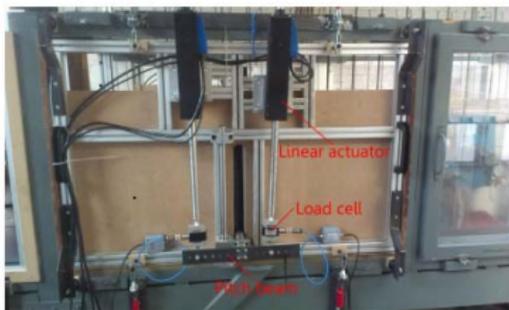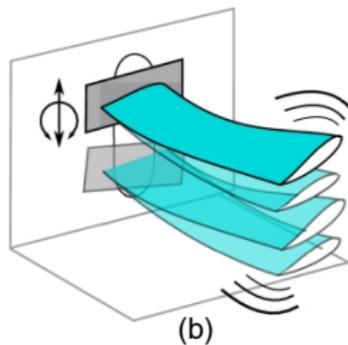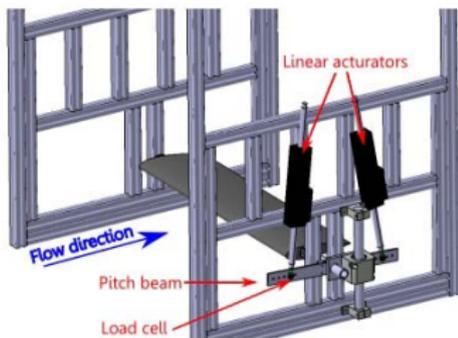

(a)

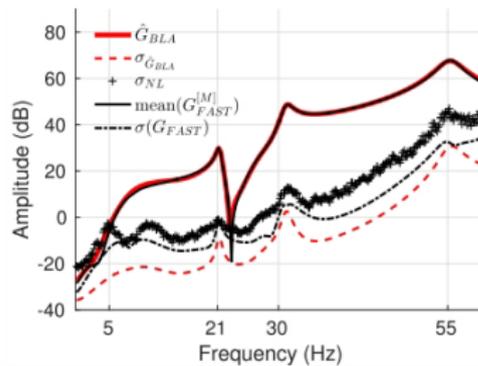

(c)